

Test accessories HF Main catalog

HFline | Test & Measurement



STÄUBLI ELECTRICAL CONNECTORS

Long-term solutions – Expert connections



Stäubli Electrical Connectors is a leading international manufacturer of high-quality electrical contacts and connector systems and solutions for industrial applications. We are part of the Stäubli mechatronics group, the technology leader in connection solutions, robotics and textile machinery.

Stäubli develops, produces, sells and services products for markets with the highest productivity and safety standards. As recognized specialists, our focus is always on solutions and customers. Many new developments got their start here and are now becoming established as worldwide standards.

Our customers depend on our expertise and our active support, even when dealing with unusual challenges. With Stäubli, you're entering into a long-term partnership built on reliability, dedication, and exceptional quality in both products and services.

Pioneering contact technology for increased efficiency

The entire Stäubli Electrical Connectors product range meets market expectations for high performance, the highest number of mating cycles, and long-lasting reliability for safe, durable operation. Our proven **MULTILAM technology** is ideal for all types of connections in industrial applications. Customers in the **power transmission and**

distribution sector rely on our consistent, loss-free transmission performance in all voltage ranges. The **automotive industry** depends on our high-efficiency connections for spot-welding applications in production lines. Harsh conditions in the **transportation sector** require high vibration resistance, maximum reliability, and compact design. These attributes are vitally important for railway and e-mobility applications. The safety

and reliability of our products are essential for **test and measurement technology.**

In the growing field of **alternative energy**, our products have been setting standards since the 1990s. About half of the solar energy generated worldwide is transmitted through safe, long-lasting, high-performance Stäubli connectors.

Applications and advantages



This product range includes passive high-frequency test probes (HF probes) and accessories as well as touch-protected BNC plug connectors, leads, adapters and converters.

Our test probes are suitable for use in CAT III- and CAT IV environments (Measurement Categories), such as the analysis of house and building installations with mains analysis/mains monitoring devices. The use of a coaxial connecting cable with a particularly

low capacitance, together with modifications in the interior of the probe, results in a further improvement in the electrical characteristics (e.g. a lower input capacity) compared with the tried and tested Isoprobe II generation of probes.

Contents

Page 5	Ordering Information	Page 41	BNC Safety Test Leads
Page 6	Isoprobe IV <ul style="list-style-type: none">■ Probe■ Probe Set■ Accessories	Page 44	Touch-protected BNC Connectors and BNC Panel-mount Sockets
Page 12	Isoprobe II <ul style="list-style-type: none">■ Probe■ Probe Set	Page 49	BNC / Ø 4 mm Adapters and Adapter Leads
Page 24	Isoprobe III <ul style="list-style-type: none">■ Probe■ Probe Set	Page 52	BNC / Ø 2 mm Adapters and Adapter Leads
Page 34	Isoprobe III-HP <ul style="list-style-type: none">■ Probe■ Probe Set■ Accessories Isoprobe II and Isoprobe III	Page 53	BNC Lead Couplers
		Page 54	BNC Signal Distributors
		Page 55	Touch-protected Adapters and Converters
		Page 56	Technical Information
		Page 61	Index

Ordering Information

Technical modifications and information given in the catalogue

We have a policy of continuous improvement and reserve the right to make technical modifications to any product in accordance with any safety and technical developments. We accept no responsibility for the accuracy of the information given in the catalogue.

Order code

When ordering, always state the order number of the article in addition to the type designation. For articles that are available in more than one colour or lead length, write the desired lengths and colour codes after the order number instead of the spaces and * used in the catalogue.

Example: The catalogue offers the following:

BNC Safety Test Lead XLSS-58,

Order No. 67.9770-*,

Lengths: 050 100 150 200 cm,

Colours: 21 22 23

For a lead with a length of 150 cm in red, your order should read as follows:

BNC Safety Test Lead XLSS-58, 150 cm, red, Order No. 67.9770-15022

Lead length

The lead length of all standard leads in this catalogue refers to the visible length of the cable.

Colour Variations

Due to the use of high-grade types of insulating materials, despite having the same colour code some of our articles may exhibit certain differences in colour (e.g. a silicone-insulated lead fitted with TPE-insulated plugs).

Delivery Time

Many products are available ex-stock. Additional assembly time may be required for those items not ex-stock. Delivery times are available on request.

Small Orders

We request that small value orders are placed with one of our distributors.

Standard and Special Designs

This catalogue details those assembled leads which are most commonly requested. We can of course manufacture to specific requests and are happy to quote for special designs. In addition, please contact us with regards to any special requirements such as alternative surface treatments.

Copyright

The use of this catalogue for any other purpose, in whatever form, without our prior written consent is not permitted.

RoHS ready

EU directive 2011/65/EC restricts the use of certain hazardous substances in electrical and electronic equipment (RoHS conformity). Although this directive is not yet applicable to electrical test accessories, for all articles presented in this catalogue we use only materials that would conform to the RoHS criteria.

Colour code

<input type="text"/> 20	green-yellow	<input type="text"/> 26	violet
<input type="text"/> 21	black	<input type="text"/> 27	brown
<input type="text"/> 22	red	<input type="text"/> 28	grey
<input type="text"/> 23	blue	<input type="text"/> 29	white
<input type="text"/> 24	yellow	<input type="text"/> 33	transparent
<input type="text"/> 25	green		

Surface treatment

<input type="text"/> Ag	silver-plated
<input type="text"/> Au	gold-plated
<input type="text"/> Ni	nickel-plated
<input type="text"/> Opt	Optalloy®-finish

Lead insulation

<input type="text"/> PVC	PVC
<input type="text"/> TPE	TPE
<input type="text"/> SIL	SIL

Lead insulation

	CE conform
	UL approval
	UL approval

Symbols



Before use, please read the enclosed user information **i000.**



The assembly instruction MA000 is available for this product.


Isoprobe IV

Oscilloscope probes in compact design

The new Isoprobe IV generation of passive probes is a highly compact addition to the Stäubli range of touch-protected high-frequency probes. The greatly reduced size of this new product substantially facilitates the conduct of measurements in a restricted space, while still retaining the good electron-

ic characteristics of Stäubli Isoprobe test probes. Despite their compact construction and correspondingly smaller clearances and creepage distances, the Isoprobe IV probes have a high touch protection rating of CAT III at 300 V. The Isoprobe IV generation is particularly suited for electronics engineers,

while the probes of the Isoprobe II and Isoprobe III series are designed primarily for electricians. The Isoprobe IV models are available as 10:1 and 100:1-divider probes.

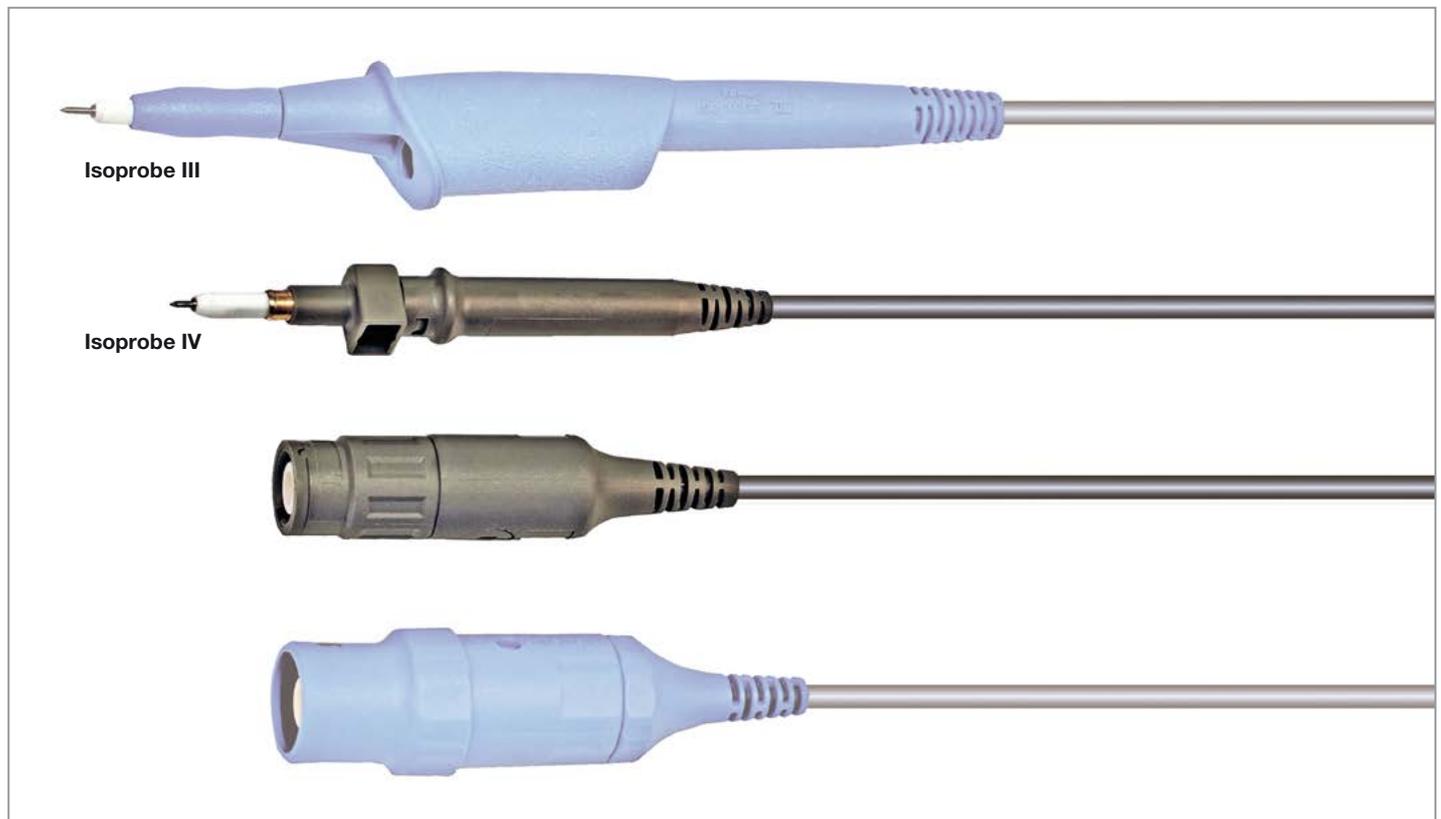

For comparison:

Compact Isoprobe IV beside a probe of the existing Isoprobe III series.


Isoprobe IV are available singly or in a set with accessories specially adapted to the new probes.



Contents of the Sets:

- 1. Oscilloscope probe Isoprobe IV- 10:1 or Isoprobe IV- 100:1
- 2. Push-on hook clip HC400
- 3. Push-on BNC adapter BA400

- 4. Push-on reference contact GS400
- 5. Reference lead with crocodile clip GM400
- 6. Set of colour clips SCC
- 7. Protective cap

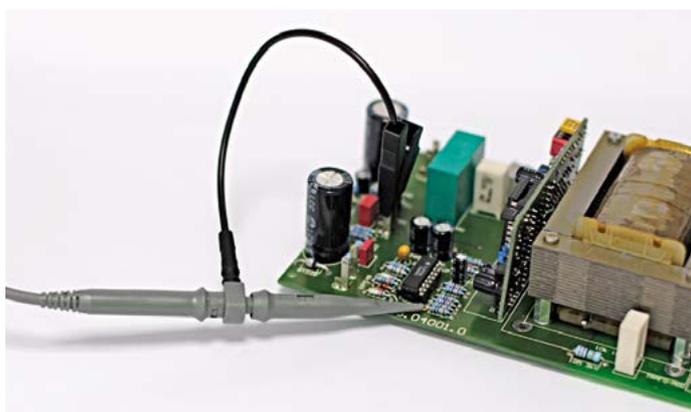


Oscilloscope probes in compact design

Isoprobe IV – 10:1

Safety high-frequency 10:1 test probe of compact design. With wide frequency range combined with low input capacitance. Highly flexible PVC-insulated coaxial connecting

lead with BNC plug with integrated compensation unit. Facility for connecting reference lead in the front part of the probe.

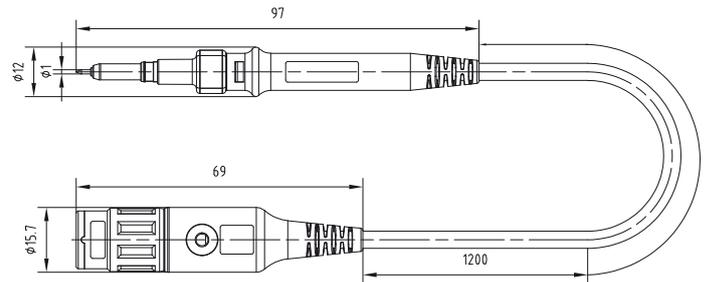

Order No.	Type		Lead length [cm]	Colour
68.9366-12028	Isoprobe IV - 10:1	PVC CE	120	28

Technical Data		
	Shield / earth	Probe tip / shield
Rated voltage (frequency-dependent)	Max. 300 V, CAT III	Max. 300 V _{r.m.s}
Dividing ratio	10:1	
Input capacitance	11 pF	
Compensation range (works setting)	10 pF ... 25 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information **i**103


www.staubli.com/electrical

Isoprobe IV – 100:1

Safety high-frequency 100:1 test prob of compact design. As a result of its low input capacitance and high input resistance, the

probe is ideally suited for measurements on sensitive circuits. Highly flexible PVC-insulated coaxial connecting lead with BNC

plug with integrated compensation unit. Facility for connecting reference lead in the front part of the probe.

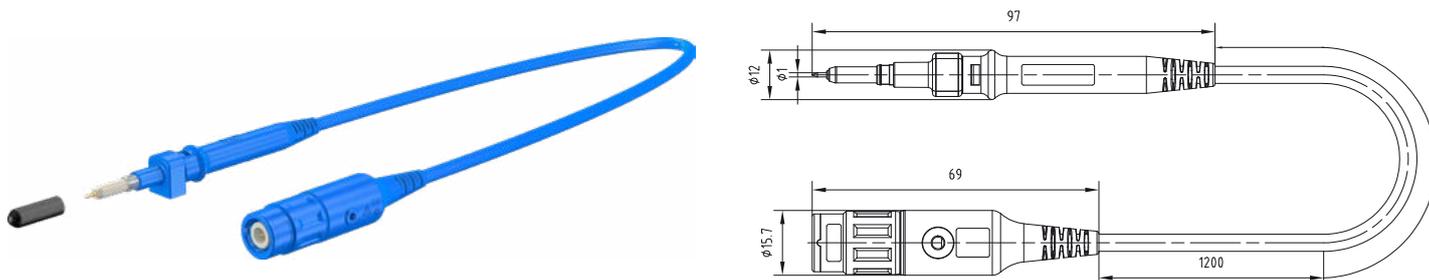

Order No.	Type		Lead length [cm]	Colour
68.9367-12023	Isoprobe IV – 100:1	PVC CE	120	23

Technical Data		
	Shield / earth	Probe tip / shield
Rated voltage (frequency-dependent)	Max. 300 V, CAT III	Max. 300 V _{r.m.s}
Dividing ratio	100:1	
Input capacitance	4.6 pF	
Compensation range (works setting)	10 pF ... 25 pF (15 pF)	
Input resistance	100 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information i104

www.staubli.com/electrical

SET Isoprobe IV – 10:1 SET Isoprobe IV – 100:1

The sets Isoprobe IV - 10:1 / 100:1 contain accessories to meet the needs of a professionally equipped electronics technician.



Order No.	Type	Rated voltage		Colour
68.9433-28	SET Isoprobe IV – 10:1	Max. 300 V, CAT III	CE ⚠ i103	28
68.9434-23	SET Isoprobe IV – 100:1	Max. 300 V, CAT III	CE ⚠ i104	23

Supplied components

Isoprobe IV – 10:1/100:1 Page 8/9			
HC400 Page 11		GM400 Page 11	
GS400 Page 11		BA400 Page 11	
SCC Page 40			




User information **i103, i104**

www.staubli.com/electrical

Isoprobe IV – Accessories

HC400


Push-on hook clip.



Order No.	Type	Rated voltage		*Colours
68.9369-*	HC400	600 V, CAT II (300 V, CAT III)	CE	23 28

GS400

Push-on reference contact.




Order No.	Type	Rated voltage		Colour
68.9443-21	GS400	30 V _{AC} /60 V _{DC}	CE cUL _{US} LISTED	21

GM400

Highly flexible reference lead with insulation in silicone. One end with fork-type plug for connecting to the shielded contact on the


side of the probe, other end with crocodile clip with allround insulation and toothed gripping jaws with fine-wire clamping surface.

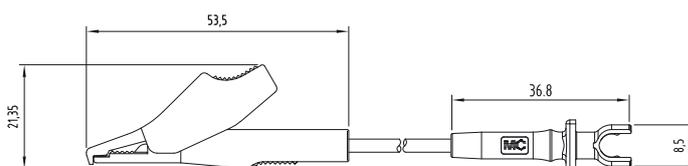

Order No.	Type	Rated voltage	Lead cross section		Lead length [cm]	Colour
68.9444-01521	GM400	600 V, CAT II (300 V, CAT III)	0.50 mm ²	SIL CE	015	21

BA400

Uninsulated push-on BNC adapter.




Order No.	Type
68.9376	BA400

Touch-protected Passive Oscilloscope Probes Isoprobe II and Probe Sets

Isoprobe II – 1:1

Safety high-frequency test probe with highly flexible PVC-insulated coaxial connecting lead with BNC plug. Ø 2 mm safety socket for reference lead connection in the handling part.

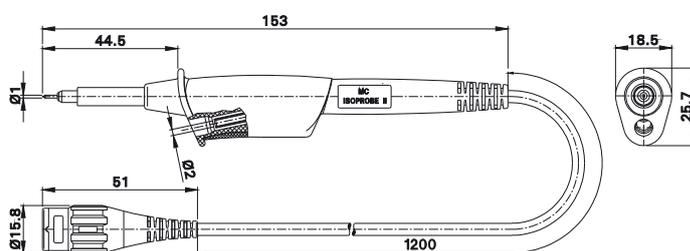

Order No.	Type		Lead length [cm]	Colour
68.9870-12021	Isoprobe II – 1:1	PVC CE cUL ^{us} LISTED	120	21

Technical Data		
Rated voltage (frequency-dependent)	Max. 300 V, CAT III	
Dividing ratio	1:1	
Input capacitance	Input capacitance of measuring instrument + 42 pF	
Input resistance	Input resistance of measuring instrument	
Frequency range	0 ... 45 MHz	
Rise time	Rise time of measuring instrument + 6 ns	
Lead length	120 cm	



User information i041

www.staubli.com/electrical


SET Isoprobe II – 1:1


Test probe set, consisting of safety high-frequency test probe Isoprobe II - 1:1 and accessories.



Order No.	Type	Rated voltage		Colour
68.9490-21	SET Isoprobe II - 1:1	Max. 300 V, CAT III	 	21

Supplied components

Isoprobe II – 1:1 Page 12	
HC200 Page 37	
GM284 Page 40	

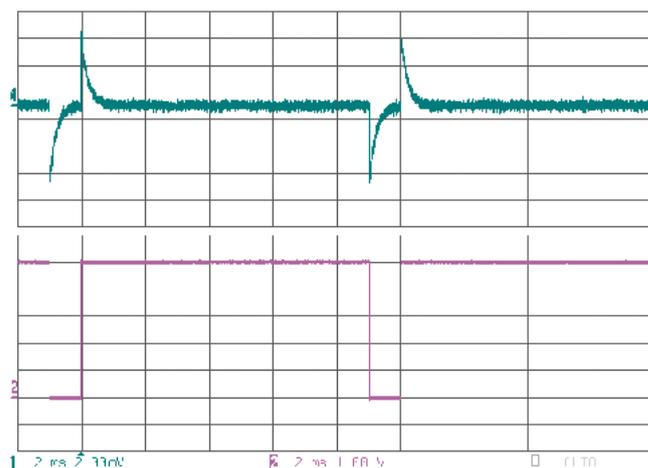


User information **i041**

www.staubli.com/electrical

Isoprobe II – 10:1 ECO

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-


ment screw and Ø 2 mm safety socket for reference lead connection in the handling part. Economically priced model.

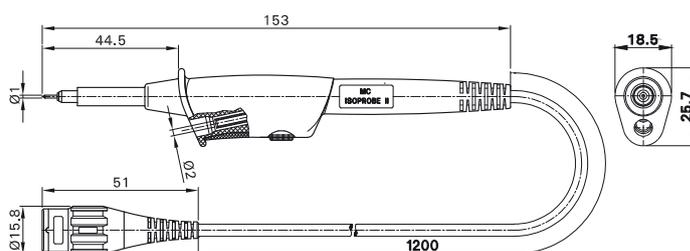

Order No.	Type		Lead length [cm]	Colour
68.9880-12028	Isoprobe II – 10:1 ECO	PVC CE cUL ^{us} LISTED	120	28

Technical Data

Rated voltage (frequency-dependent)	Max. 600 V, CAT II (300 V, CAT III)
Dividing ratio	10:1
Input capacitance	13 pF
Compensation range (works setting)	10 pF ... 30 pF (15 pF)
Input resistance	10 MΩ
Frequency range	0 ... 500 MHz
Rise time	1 ns
Lead length	120 cm

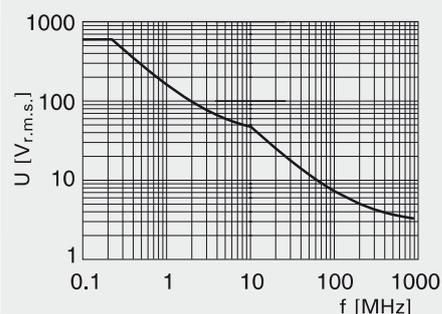

User information i048

www.staubli.com/electrical

SET Isoprobe II – 10:1 ECO

The basic set Isoprobe II - 10:1 ECO includes a basic set of accessories for effect-


ing safe and accurate high-frequency measurements. Good value for money.



Order No.	Type	Rated voltage		Colour
68.9491-28	SET Isoprobe II – 10:1 ECO	Max. 600 V, CAT II (300 V, CAT III)	  	28

Supplied components

Isoprobe II – 10:1 ECO Page 14	
HC200 Page 37	
GS400 Page 38	
GM284 Page 40	

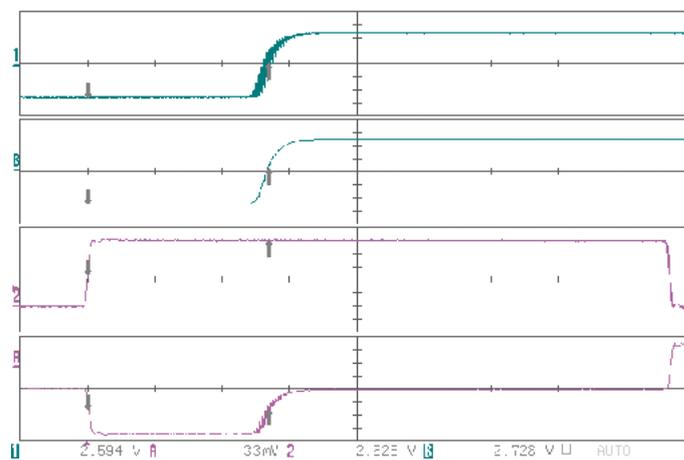


User information **i048**

www.staubli.com/electrical

Isoprobe II – 10:1 HF

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjustment screw and Ø 2 mm safety socket for


reference lead connection in the handling part. Wide frequency range combined with high dielectric strength.

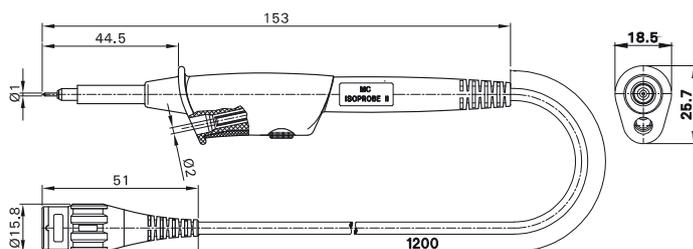

Order No.	Type		Lead length [cm]	Colour
68.9872-12022	Isoprobe II – 10:1 HF	PVC CE cUL _{us} LISTED	120	22

Technical Data

Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III)
Dividing ratio	10:1
Input capacitance	14 pF
Compensation range (works setting)	12 pF ... 22 pF (15 pF)
Input resistance	10 MΩ
Frequency range	0 ... 450 MHz
Rise time	1 ns
Lead length	120 cm

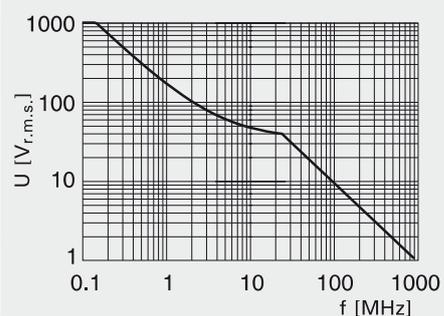

User information i042

www.staubli.com/electrical



SET Isoprobe II – 10:1 HF


Test probe set with extensive range of accessories for the needs of the professionally equipped test engineer.



Order No.	Type	Rated voltage		Colour
68.9492-22	SET Isoprobe II – 10:1 HF	Max. 1000 V, CAT II (600 V, CAT III)	CE 	22

Supplied components

Isoprobe II – 10:1 HF Page 16	
HC200 Page 37	
GS400 Page 38	
GH284 Page 39	
GM284 Page 40	

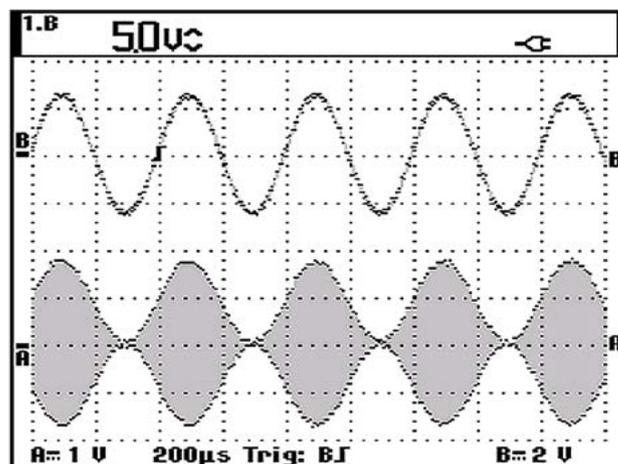


User information **i042**

www.staubli.com/electrical

Isoprobe II – 10:1 HS

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-


ment screw and Ø 2 mm safety socket for reference lead connection in the handling part.

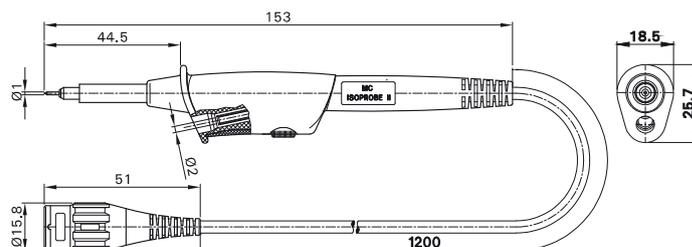

Order No.	Type		Lead length [cm]	Colour
68.9871-12028	Isoprobe II – 10:1 HS	PVC CE cUL LISTED	120	28

Technical Data

Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III)
Dividing ratio	10:1
Input capacitance	16 pF
Compensation range (works setting)	10 pF ... 35 pF (25 pF)
Input resistance	10 MΩ
Frequency range	0 ... 250 MHz
Rise time	1.2 ns
Lead length	120 cm

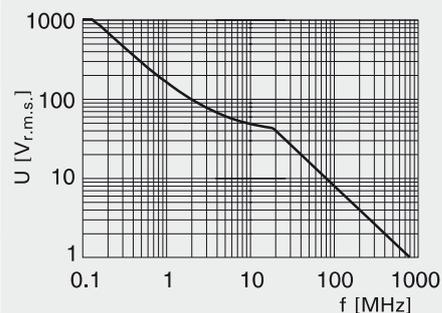

User information i062

www.staubli.com/electrical

SET Isoprobe II – 10:1 HS


Test probe set with an extensive range of accessories, suitable for users like electric power engineers who carry out measurements directly on the mains.



Order No.	Type	Rated voltage		Colour
68.9493-28	SET Isoprobe II – 10:1 HS	Max. 1000 V, CAT II (600 V, CAT III)	CE cULus LISTED	28

Supplied components

Isoprobe II – 10:1 HS Page 18	
HC200 Page 37	
AC200 Page 37	
GM284 Page 40	
AB200 Page 39	
GB284 Page 40	

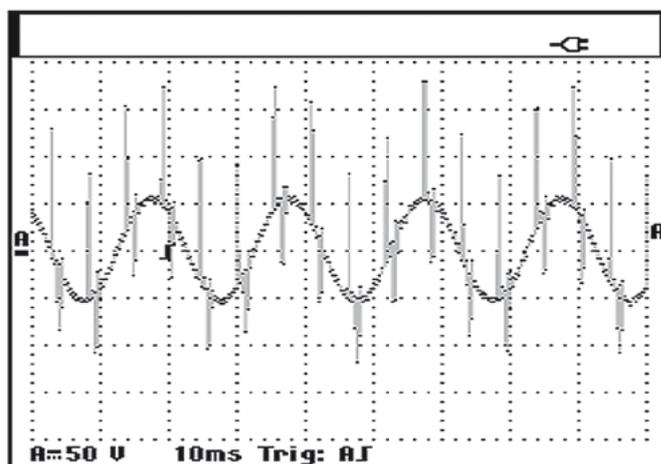


User information **i062**

www.staubli.com/electrical

Isoprobe II – 10:1 – 2,5

Safety high-frequency 10:1 test probe with a long, highly flexible PVC-insulated coaxial connecting lead with BNC plug, specially suited for bridging long distances between the test instrument and the object under

test. Compensation adjustment screw and Ø 2 mm safety socket for reference lead connection in the handling part.

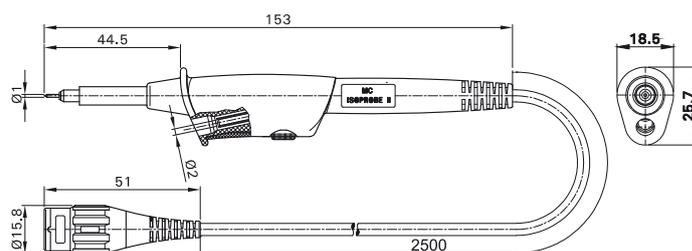

Order No.	Type		Lead length [cm]	Colour
68.9495-25022	Isoprobe II – 10:1 – 2,5	PVC CE UL LISTED	250	22

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III)	
Dividing ratio	10:1	
Input capacitance	18 pF	
Compensation range (works setting)	10 pF ... 30 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 150 MHz	
Rise time	1.3 ns	
Lead length	250 cm	



User information i052

www.staubli.com/electrical

SET Isoprobe II – 10:1 – 2,5

Test probe set, consisting of safety high-frequency test probe Isoprobe II - 10:1 - 2,5 and accessories. The test probe with long

connecting lead is specially suited for bridging long distances between the test instrument and the object under test.



Order No.	Type	Rated voltage		Colour
68.9496-22	SET Isoprobe II – 10:1 – 2,5	Max. 1000 V, CAT II (600 V, CAT III)	CE 	22

Supplied components

Isoprobe II – 10:1 – 2,5 Page 20	
HC200 Page 37	
GM284 Page 40	



User information **i052**


www.staubli.com/electrical

Isoprobe II – 100:1

Safety high-frequency 100:1 test probe for safe measurements at high voltages. With highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation

adjustment screw and Ø 2 mm safety socket for reference lead connection in the handling part. As a result of its low input capacitance and high input impedance, the probe is ide-

ally suited for measurements on sensitive circuits.

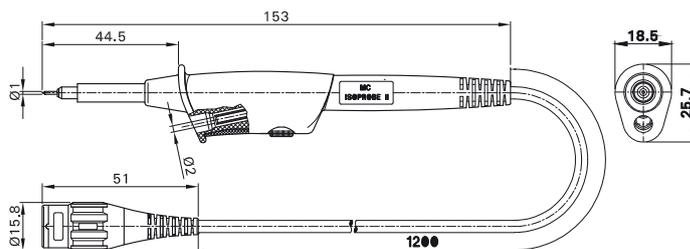

Order No.	Type		Lead length [cm]	Colour
68.9873-12023	Isoprobe II – 100:1	PVC CE UL LISTED	120	23

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III) (Max. 3540 V, CAT I)	
Dividing ratio	100:1	
Input capacitance	6.5 pF	
Compensation range (works setting)	10 pF ... 25 pF (15 pF)	
Input resistance	100 MΩ	
Frequency range	0 ... 300 MHz	
Rise time	1 ns	
Lead length	120 cm	



User information i043

www.staubli.com/electrical

SET Isoprobe II – 100:1

Test probe set for safe measurements at high voltages. As a result of its low input capacitance and high input impedance, the


probe is ideally suited for measurements on sensitive circuits.



Order No.	Type	Rated voltage		Colour
68.9494-23	SET Isoprobe II – 100:1	Max. 1000 V, CAT II (600 V, CAT III) (max. 3540 V, CAT I)	 	23

Supplied components

Isoprobe II – 100:1 Page 22	
ZGA-S Page 37	
GS400 Page 38	
GM284 Page 40	

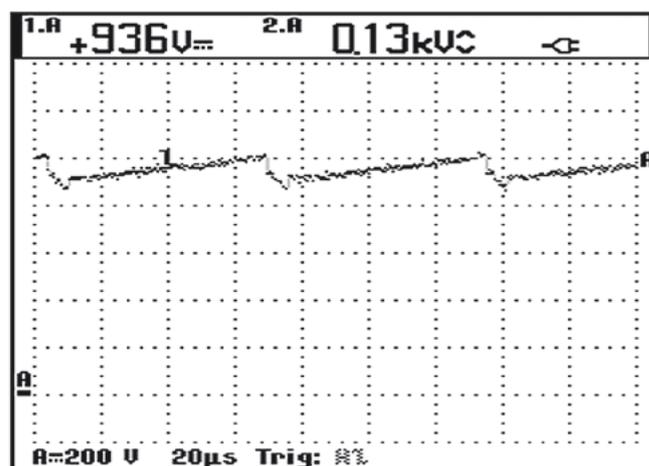

User information **i043**


www.staubli.com/electrical

Touch-protected Passive Oscilloscope Probes Isoprobe III and Probe Sets

Isoprobe III – 10:1 ECO

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compensation unit. Ø 2 mm safety socket

for reference lead connection in the handling part of the probe. Good value for money.

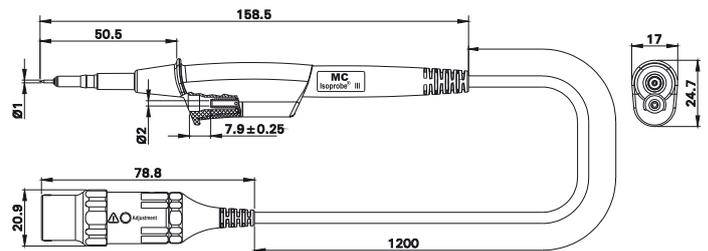

Order No.	Type		Lead length [cm]	Colour
68.9501-12028	Isoprobe III – 10:1 ECO	PVC CE UL LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 600 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	12 pF	
Compensation range (works setting)	10 pF ... 22 pF (15 pF)	
Input impedance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information i086

www.staubli.com/electrical

SET Isoprobe III – 10:1 ECO


The basic set Isoprobe III - 10:1 ECO includes a basic set of accessories for effect-


ing safe and accurate high-frequency measurements. Good value for money.



Order No.	Type	Rated voltage		Colour
68.9558-28	SET Isoprobe III – 10:1 ECO	Max. 600 V, CAT III (600 V, CAT IV)	 	28

Supplied components

Isoprobe III – 10:1 ECO Page 25	
ZGA-S Page 37	
GS400 Page 38	
GM284 Page 40	
SK-IP Page 39	
SCC Page 40	

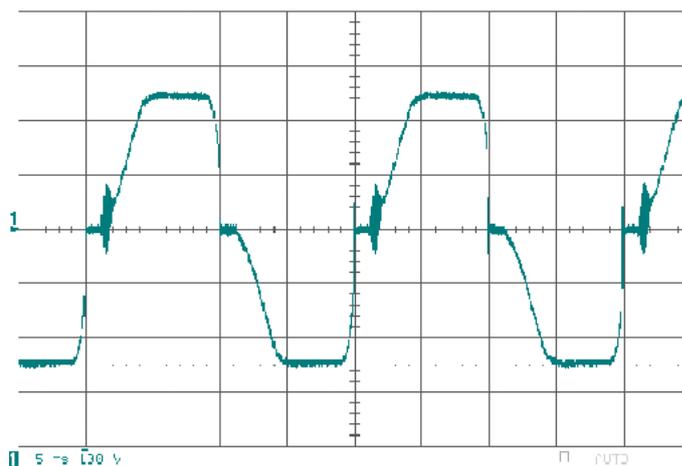

User information **i086**


www.staubli.com/electrical

Isoprobe III – 10:1 HF

Safety high-frequency 10:1 test probe with wide frequency range combined with low input capacitance. Highly flexible PVC-

insulated coaxial connecting lead with BNC plug with integrated compensation unit.

Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

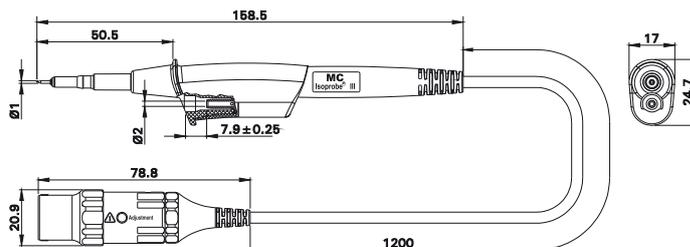

Order No.	Type		Lead length [cm]	Colour
68.9534-12028	Isoprobe III – 10:1 HF	PVC CE cULus LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	12 pF	
Compensation range (works setting)	10 pF ... 22 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information i084

www.staubli.com/electrical

SET Isoprobe III – 10:1 HF


The Isoprobe III - 10:1 HF set with an extensive range of accessories meets the needs


of the professionally equipped electronic engineer.



Order No.	Type	Rated voltage		Colour
68.9556-28	SET Isoprobe III – 10:1 HF	Max. 1000 V, CAT III (600 V, CAT IV)	CE 	28

Supplied components

Isoprobe III – 10:1 HF Page 27			
ZGA-S Page 37		SK-IP Page 39	
GS400 Page 38		SCC Page 40	
GH284 Page 39			
GM284 Page 40			

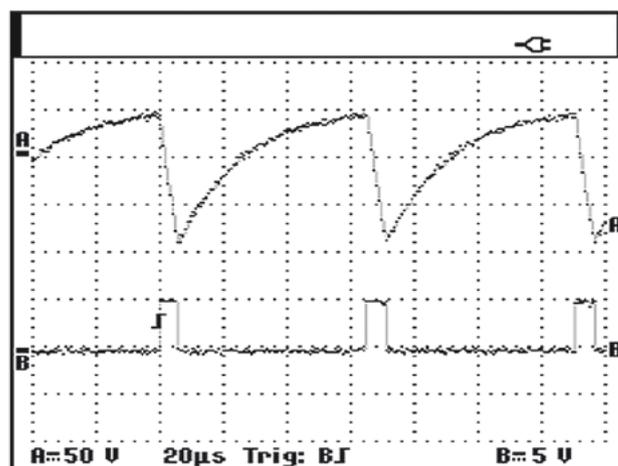


User information **i084**

www.staubli.com/electrical

Isoprobe III – 10:1 HS

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated

compensation unit. Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

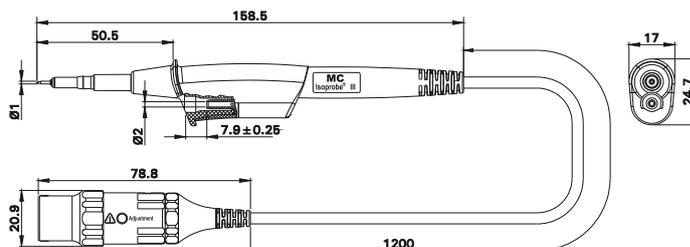

Order No.	Type		Lead length [cm]	Colour
68.9533-12028	Isoprobe III – 10:1 HS	PVC CE cUL _{US} LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	13.5 pF	
Compensation range (works setting)	10 pF ... 30 pF (25 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 300 MHz	
Rise time	1.1 ns	
Lead length	120 cm	



User information i085

www.staubli.com/electrical

SET Isoprobe III – 10:1 HS

The particularly comprehensive accessories of the set Isoprobe III - 10:1 HS include, among others, two jaw clips for applications


such as test connections to busbars. This set addresses itself to heavy-current engi-


neers who make measurements directly on the mains.



Order No.	Type	Rated voltage		Colour
68.9557-28	SET Isoprobe III – 10:1 HS	Max. 1000 V, CAT III (600 V, CAT IV)	CE 	28

Supplied components

Isoprobe III – 10:1 HS Page 29			
ZGA-S Page 37		SK-IP Page 39	
AC200 Page 37		SCC Page 40	
GM284 Page 40			
AB200 Page 39			
GB284 Page 40			

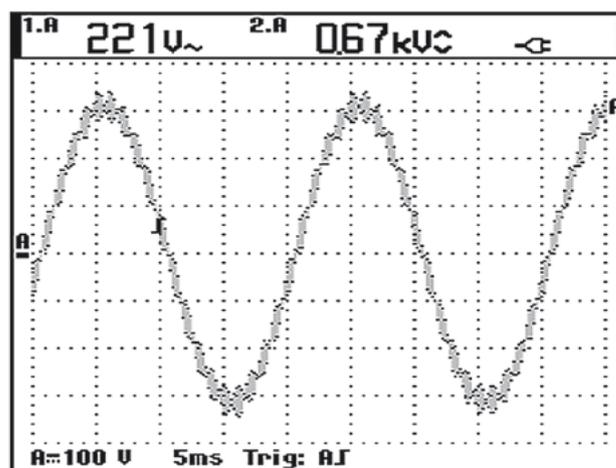


User information **i085**

www.staubli.com/electrical

Isoprobe III – 10:1 – 2,5

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compensation unit. Ø 2 mm safety socket for reference lead connection in the handling

part of the probe. With long connecting lead, specially suited for bridging long distances between the test instrument and the object under test.

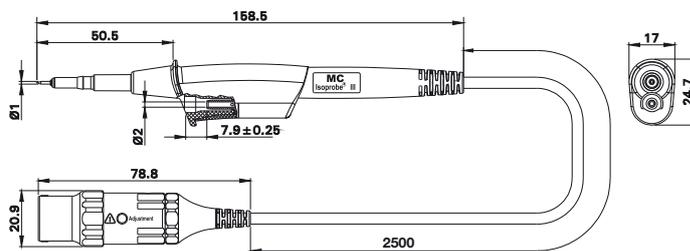

Order No.	Type		Lead length [cm]	Colour
68.9549-25028	Isoprobe III – 10:1 – 2,5	PVC CE UL LISTED	250	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	18 pF	
Compensation range (works setting)	10 pF ... 30 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 250 MHz	
Rise time	1.3 ns	
Lead length	250 cm	



User information i088

www.staubli.com/electrical

SET Isoprobe III – 10:1 – 2,5

Test probe set, consisting of safety high-frequency test probe Isoprobe III - 10:1 - 2,5 and accessories. The test probe with long

connecting lead is specially suited for bridging long distances between the test instrument and the object under test.



Order No.	Type	Rated voltage		Colour
68.9554-28	SET Isoprobe III – 10:1 – 2,5	Max. 1000 V, CAT III (600 V, CAT IV)	 	28

Supplied components

Isoprobe III – 10:1 – 2,5 Page 30	
ZGA-S Page 37	
GM284 Page 40	
SK-IP Page 39	
SCC Page 40	



User information **i088**


www.staubli.com/electrical

Isoprobe III – 100:1

Safety high-frequency 100:1 test probe for safe measurements at high voltages. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated compen-

sation unit. Ø 2 mm safety socket for reference lead connection in the handling part of the probe. As a result of its low input capacitance and high input resistance, the probe

is also ideally suited for measurements on sensitive circuits.

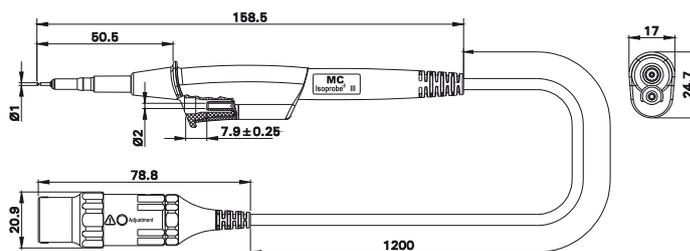

Order No.	Type		Lead length [cm]	Colour
68.9548-12023	Isoprobe III – 100:1	PVC CE U _L LISTED	120	23

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV) (Max. 3540 V, CAT I)	
Dividing ratio	100:1	
Input capacitance	4.6 pF	
Compensation range (works setting)	10 pF ... 25 pF (15 pF)	
Input resistance	100 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information i087

www.staubli.com/electrical

SET Isoprobe III – 100:1


Test probe set for safe measurements at high voltages. Due to the low input capacity and high input impedance of the probe, the Set


Isoprobe III - 100:1 is also particularly suited for measurements on sensitive circuits.



Order No.	Type	Rated voltage		Colour
68.9559-23	SET Isoprobe III – 100:1	Max. 1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I)	 	23

Supplied components

Isoprobe III – 100:1 Page 32	
ZGA-S Page 37	
GS400 Page 38	
GM284 Page 40	
SK-IP Page 39	
SCC Page 40	

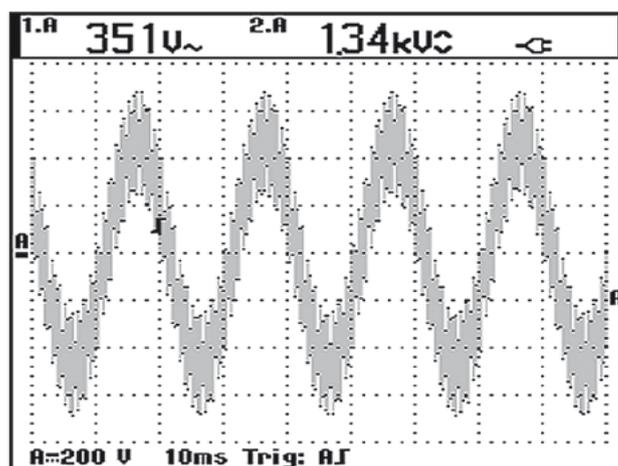

User information i087

www.staubli.com/electrical

High-pass Oscilloscope Probe: Isoprobe III-HP

With Isoprobe III - HP we have added a probe with an integrated high-pass filter to our Isoprobe III range of touch-protected high-frequency probes.

The new development can, for instance, be used for transient measurement in network analysis.

The insulators are designed for max. 1000 V, CAT III resp. 600 V, CAT IV (frequency-dependent) in accordance with IEC / EN 61010-031, which allows safe use in corresponding environments – provided that appropriate accessories and test instruments are used.

The integrated high-pass filter suppresses the low-frequency components of a signal (still present on the left), thus improving visibility of the high-frequency components such as transients (right).



The Isoprobe III - HP probe is available both separately and in a set with ample accessories.

Accessories of SET Isoprobe III - HP:

- ZGA-S: Push-on hook clip
 - GM284: Reference lead with crocodile clip
 - SK-IP: Push-on insulating sleeve
 - SCC: Set of colour clips
- *: Protective cap



Isoprobe III – HP


Safety high-frequency oscilloscope probe with an integrated high-pass filter. Highly flexible PVC-insulated coaxial connecting

lead with BNC plug. Ø 2 mm safety socket for reference lead connection in the handling part of the probe.



User information **i100**


www.staubli.com/electrical

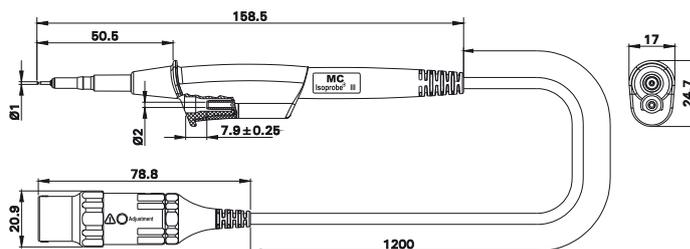

Order No.	Type		Lead length [cm]	Colour
68.9455-12028	Isoprobe III – HP	PVC	120	28

Technical Data

Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV) (Max. 3540 V, CAT I)
Dividing ratio ($\pm 3\%$, $f=10$ kHz)	100:1 ($f > 1,1$ kHz)
Attenuation ($f = 50$ Hz compared with 10 kHz)	> 40dB
Input capacitance	< 8 pF
Scope capacitance	12 pF ... 25 pF
Input resistance	100 M Ω
Frequency range	1.1 kHz ... 35 MHz (3 dB)
Rise time	< 10ns
Lead length	120 cm

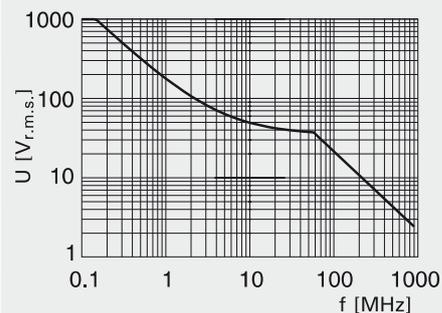

SET Isoprobe III – HP

The set Isoprobe III - HP contains accessories to meet the needs of a professionally equipped test engineer.



Order No.	Type	Rated voltage		Colour
68.9456-28	SET Isoprobe III – HP	Max. 1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I)	PVC CE	28

Supplied components

Isoprobe III – HP Page 35	
ZGA-S Page 37	
GM284 Page 40	
SK-IP Page 39	
SCC Page 40	




User information **i**100

www.staubli.com/electrical

Isoprobe II / III – Accessories

HC200


Push-on hook clip.

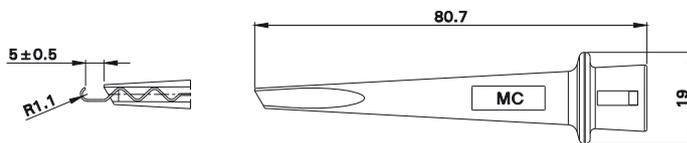

Order No.	Type	Rated voltage		*Colours
68.9480-*	HC200	1000 V, CAT II (600 V, CAT III)	 	

ZGA


Push-on hook clip.

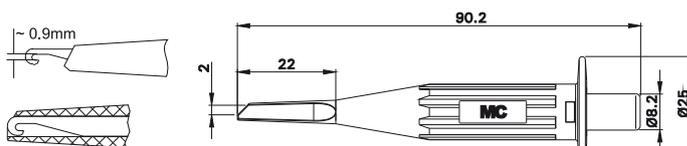

Order No.	Type	Rated voltage		*Colours
68.9817-*	ZGA	1000 V, CAT II (600 V, CAT III)	 	

ZGA-S


Push-on hook clip.

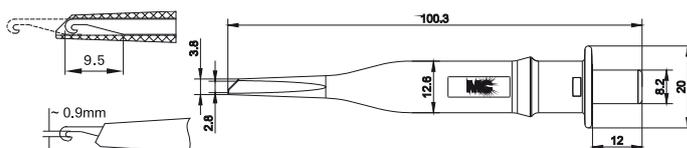

Order No.	Type	Rated voltage		*Colours
68.9805-*	ZGA-S	1000 V, CAT III (600 V, CAT IV) (max. 3540 V, CAT I)	 	

AC200


Push-on safety jaw clip. For increased safety when making connections, the jaws are insulated on the outside.



Order No.	Type	Rated voltage		*Colours
68.9485-*	AC200	1000 V, CAT III (600 V, CAT IV)	 	

PB200


Push-on Ø 4 mm test probe.

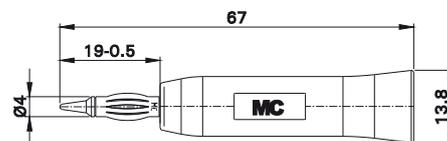

Order No.	Type	Rated voltage		*Colours
68.9481-*	PB200	1000 V, CAT II		21 22 23 28

PT200


Push-on Ø 2 mm test probe.

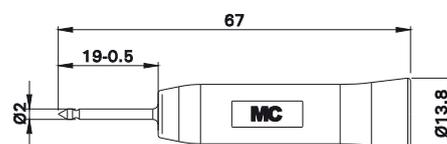

Order No.	Type	Rated voltage		*Colours
68.9483-*	PT200	1000 V, CAT II		21 22 23 28

GS400


Push-on reference contact.



Order No.	Type	Rated voltage		Colour
68.9443-21	GS400	30 V _{AC} / 60 V _{DC}		21

XTBA

Push-on BNC male connector.

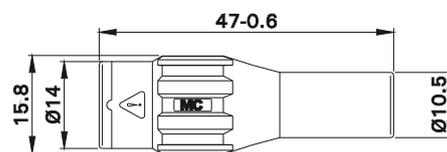

Order No.	Type	Rated voltage		*Colours
68.9809-*	XTBA	Max. 1000 V, CAT II (600 V, CAT III)		21 22 23




User information **i013**

www.staubli.com/electrical

SK-IP

Push-on insulating sleeve.




Order No.	Type	*Colours
68.9514-*	SK-IP	23 28

AB200

Test clip with steel jaws especially for connections to ground rails and thick cables. For increased safety when making connec-

tions, the jaws are insulated on the outside. Ø 4 mm rigid socket in handle accepting


spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

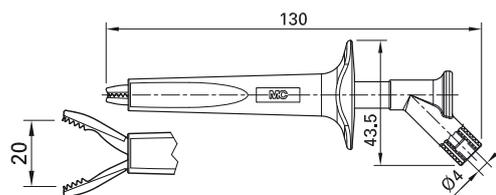

Order No.	Type	Rated voltage/current		*Colours
66.9474-*	AB200	1000 V, CAT IV / 20 A	Ni CE cUL _{US} LISTED	21 22 23 28

GH284

Ø 2 mm Reference lead with hook clip (length 15 cm).

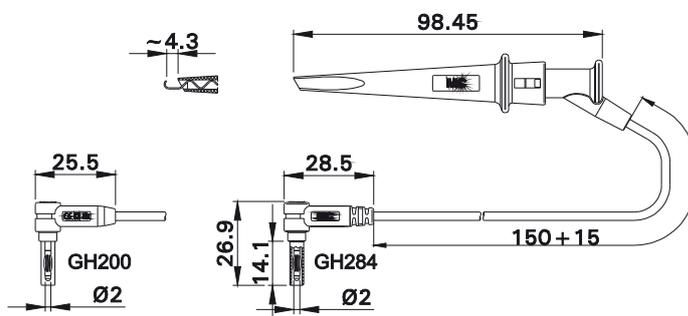


Order No.	Type	Rated voltage	Lead cross section		Lead length [cm]	Colour
68.9519-01521	GH284	1000 V, CAT III (600 V, CAT IV)	0.50 mm ²	SIL CE cUL _{US} LISTED	015	21

GM284

Highly flexible reference leads with insulation in PVC or silicone. One end with right

angled Ø 2 mm plug with rigid insulating sleeve, other end with crocodile clip with all-

round insulation and toothed gripping jaws with fine-wire clamping surface.

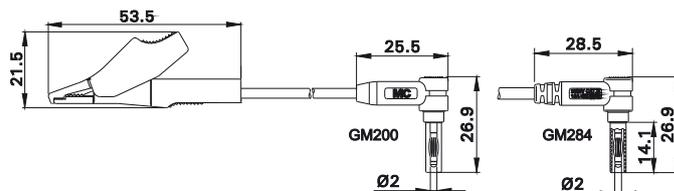


Order No.	Type	Rated voltage/current	Lead cross section		Lead length [cm]	Colour
68.9517-02521	GM284	1000 V, CAT III (600 V, CAT IV) / 10 A	0.50 mm ²	SIL CE cUL ^{US} LISTED	025	21

GB284

Highly flexible Silicone-insulated reference leads. One end with Ø 2 mm safety plug,



other end with Ø 4 mm safety plug. Lead length: 50 cm.

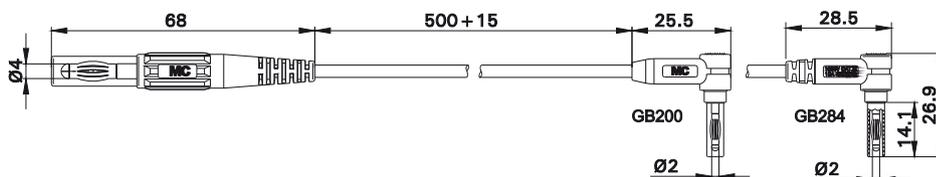

Order No.	Type	Rated voltage/current	Lead cross section		Lead length [cm]	Colour
68.9518-05021	GB284	1000 V, CAT III (600 V, CAT IV) / 10 A	0.75 mm ²	SIL CE cUL ^{US} LISTED	050	21

SCC

Set of colour clips for Isoprobe connecting lead (5 x 2 pcs.).



Order No.	Type
68.9513	SCC

BNC Safety Test Leads

XLSS-58 XLSK-58


Touch-protected coaxial test leads. Versions with BNC male connectors on both ends or with male and female connector. The shield

of the BNC connectors is nickel-plated, the contact pins and sockets of the inner conductor are in gold-plated brass.



User information **i013, i014**

www.staubli.com/electrical

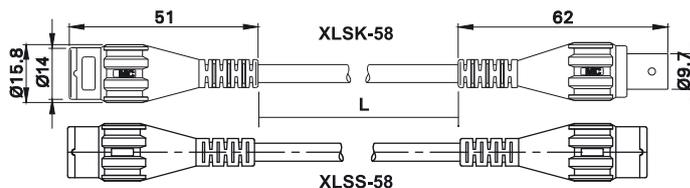

Order No.	Type		Lead lengths L [cm]	*Colours
67.9770- <input type="checkbox"/> *	XLSS-58	Au Ni PVC CE	<input type="checkbox"/> 50 <input type="checkbox"/> 100 <input type="checkbox"/> 150 <input type="checkbox"/> 200	<input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23
67.9773- <input type="checkbox"/> *	XLSK-58	Au Ni PVC CE	<input type="checkbox"/> 50 <input type="checkbox"/> 100 <input type="checkbox"/> 150 <input type="checkbox"/> 200	<input type="checkbox"/> 21 <input type="checkbox"/> 22 <input type="checkbox"/> 23


Technical Data		
Type	XLSS-58	XLSK-58
Rated voltage	1000 V, CAT II (600 V, CAT III)	600 V, CAT II (300 V, CAT III)
Impedance	50 Ω	50 Ω
Capacity	60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm)	60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm)
Inductance	170 nH (L = 50 cm) 340 nH (L = 100 cm) 510 nH (L = 150 cm) 680 nH (L = 200 cm)	170 nH (L = 50 cm) 340 nH (L = 100 cm) 510 nH (L = 150 cm) 680 nH (L = 200 cm)
VSWR (frequency-dependent)		
Typical values!		
Attenuation (frequency-dependent)		
	RG174 RG58 SILI-SC 0,5/1,0	
Coaxial lead / Insulation	RG58 / PVC	RG58 / PVC
Coaxial lead / Temperature range	-10°C ... +70°C	-10°C ... +70°C

XLSS-174

Touch-protected PVC-insulated coaxial test leads. Version with BNC male connector

on both ends. The shield of the BNC connectors is nickel-plated, the contact pins

and sockets of the inner conductor are in gold-plated brass.

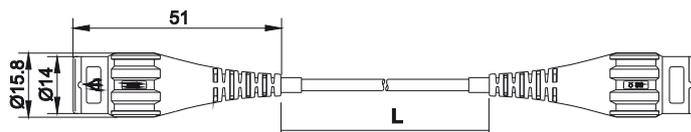

Order No.	Type		Lead lengths L [cm]	*Colours
67.9553- <input type="checkbox"/> 21	XLSS-174	Au Ni PVC	<input type="checkbox"/> 050 <input type="checkbox"/> 100 <input type="checkbox"/> 150 <input type="checkbox"/> 200	<input checked="" type="checkbox"/> 21

Technical Data	
Rated voltage	600 V, CAT II (300 V, CAT III)
Impedance	50 Ω
Capacity	60 pF (L = 50 cm) 113 pF (L = 100 cm) 166 pF (L = 150 cm) 219 pF (L = 200 cm)
Inductance	225 nH (L = 50 cm) 450 nH (L = 100 cm) 675 nH (L = 150 cm) 900 nH (L = 200 cm)
VSWR (frequency-dependent) Typical values!	
Attenuation (frequency-dependent) RG174 RG58 SILI-SC 0,5/1,0	
Coaxial lead / Insulation	RG174 / PVC
Coaxial lead / Temperature range	-10°C ... +70°C



User information **i013**


www.staubli.com/electrical

XLSS/SIL

Touch-protected silicone insulated coaxial test leads with BNC male connectors on

both ends, e. g. for connecting measuring instruments. The shield of the BNC connec-

tors is nickel-plated, the contact pins of the inner conductor are in gold-plated brass.

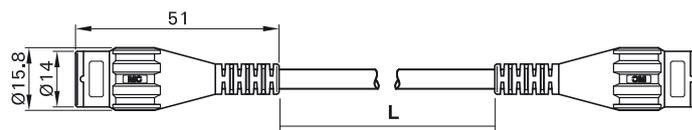

Order No.	Type		Lead lengths L [cm]	*Colours
67.9756- <input type="checkbox"/> *	XLSS/SIL	Au Ni SIL CE cULUS LISTED	050 100 150 200	21 22 28

Technical Data	
Rated voltage	1000 V, CAT II (600 V, CAT III)
Impedance	~ 45 Ω
Capacity	85 pF (L = 50 cm) 162 pF (L = 100 cm) 240 pF (L = 150 cm) 317 pF (L = 200 cm)
Inductance	160 nH (L = 50 cm) 320 nH (L = 100 cm) 480 nH (L = 150 cm) 640 nH (L = 200 cm)
Attenuation (frequency-dependent)	<p>RG174 RG58 SILI-SC 0,5/1,0</p>
Coaxial lead / Insulation	SILI-SC 0,5/1,0 / Silicon
Coaxial lead / Temperature range	-50°C ... +150°C



User information i014

www.staubli.com/electrical

Note:

In the assembly of BNC leads for use in the high-frequency range, the plugs and coax cables must be carefully matched in order to ensure unimpaired signal transmission. We will be pleased to advise you. In our main catalogue for cables and multistrand wires you will

find highly flexible silicone and PVC insulated coaxial leads in various colours together with a wide range of other multi-strand cables. Order it now!

Touch-protected BNC Connectors and BNC Panel-mount Sockets


XBS-58 XBK-58

Touch-protected BNC male and female connectors for production of touch-protected


BNC leads (RG58). Shield is nickel-plated, the contact pins and sockets of the inner

conductor are in gold-plated brass.

XBS-58







XBK-58



Order No.	Type	Assembly instructions		*Colours
67.9760-*	XBS-58	MAH 529	Au Ni	21 22 23 28
67.9762-*	XBK-58	MAH 540	Au Ni	21 22 23 28

Technical Data

Type	XBS-58	XBK-58
Rated voltage / current	1000 V, CAT II (600 V, CAT III) / 1 A	600 V, CAT II (300 V, CAT III) / 1 A
Frequency range	0 ... 3000 MHz	0 ... 3000 MHz
VSWR (frequency-dependent) Typical values!	f = 2000 MHz: < 1.2 	f = 2000 MHz: < 1.2 
Insertion loss (frequency-dependent) Typical values!	f = 2000 MHz: < 0.2 dB 	f = 2000 MHz: < 0.4 dB 
Connectable coaxial lead: Type / outer diameter	RG58 / ~ Ø 5 mm	RG58 / ~ Ø 5 mm
Temperature range	+5°C ... +40°C	+5°C ... +40°C




Assembly instructions MAH 529, MAH 540

www.staubli.com/electrical

XBB-C58

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-drilled panels of plastic, metal, etc. Shield

is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Connection for RG58 cable.

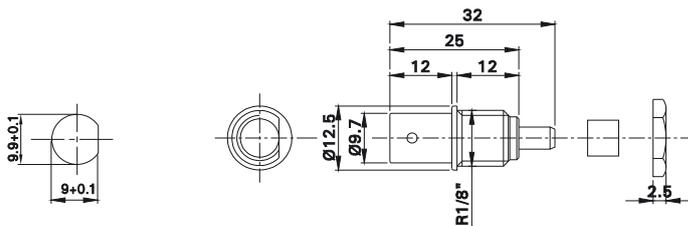

Order No.	Type	Shield connection		*Colours
67.9766-*	XBB-C58	RG58	Au Ni	21 22 23 28

Technical Data

Rated voltage / current	600 V, CAT II (300 V, CAT III) / 1 A
Frequency range	0 ... 3000 MHz
VSWR (frequency-dependent) Typical values!	<p>$f = 2000 \text{ MHz}: < 1.2$</p>
Insertion loss (frequency-dependent) Typical values!	<p>$f = 2000 \text{ MHz}: < 0.4 \text{ dB}$</p>
Connection inner conductor	Contact socket (brass, gold-plated) for crimp or solder connection
Shield connection	Crimp connection (brass, nickel-plated) for RG58
Temperature range	+5°C ... +40°C



Assembly instructions MAH 542



www.staubli.com/electrical

XBB-L XBB-LL

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-

drilled panels of plastic, metal, etc. Shield is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Type

XBB-LL with extended shield for better radiation suppression in unmated condition. Solder connection.

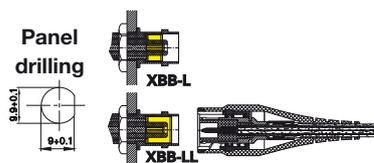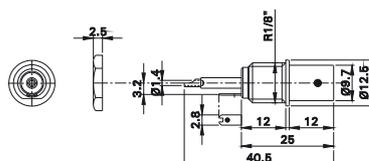

Order No.	Type	Type of shield		*Colours
67.9764-*	XBB-L	short	Au Ni Ag	21 22 23 28
67.9571-*	XBB-LL	long	Au Ni Ag	21 22 23 28

Technical Data		
Type	XBB-L	XBB-LL
Rated voltage / current	1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1 A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1 A	1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1 A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1 A
Frequency range	0 ... 1500 MHz	0 ... 1500 MHz
VSWR (frequency-dependent) Typical values!	f = 500 MHz: < 1.2 	f = 500 MHz: < 1.2
	Insertion loss (frequency-dependent) Typical values!	f = 500 MHz: < 0.2 dB
Connection inner conductor	Round solder pin (brass, gold-plated)	Round solder pin (brass, gold-plated)
Shield connection	Solder connection (brass, silver-plated)	Solder connection (brass, silver-plated)
Temperature range	+5°C ... +40°C	+5°C ... +40°C



Assembly instructions MAH 530

www.staubli.com/electrical

¹⁾ For mounting into pre-drilled plastic housings (double insulation) or metal housings³⁾ (basic insulation, with protective conductor)

²⁾ For mounting into pre-drilled metal housings³⁾ (double insulation, without protective conductor)



³⁾ Panel thickness max. 3 mm

XBB-P XBB-PL

Touch-protected BNC panel-mount sockets for accepting BNC male connectors. The sockets can be screw-mounted into pre-

drilled panels of plastic, metal, etc. Shield is nickel-plated, the contact socket of the inner conductor is in gold-plated brass. Type

XBB-PL with extended shield for better radiation suppression in unmatched condition. Solder connection wires.

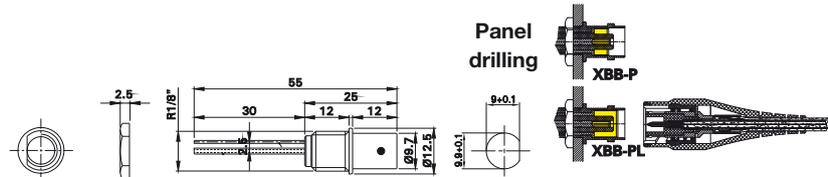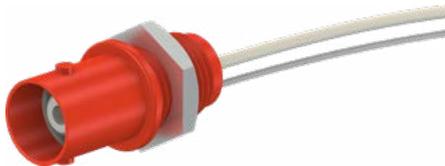

Order No.	Type	Type of shield		*Colours
67.9765-*	XBB-P	short	Au Ni Ag	21 22 23 28
67.9572-*	XBB-PL	long	Au Ni Ag	21 22 23 28

Technical Data		
Type	XBB-P	XBB-PL
Rated voltage / current	1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1A	1000 V, CAT II ¹⁾ (600 V, CAT III) ¹⁾ / 1A 600 V, CAT II ²⁾ (300 V, CAT III) ²⁾ / 1A
Frequency range	0 ... 2000 MHz	0 ... 2000 MHz
VSWR (frequency-dependent) Typical values (short connecting wires)!	f = 500 MHz: < 1.2 	f = 500 MHz: < 1.2
Insertion loss (frequency-dependent) Typical values (short connecting wires)!	f = 500 MHz: < 0.2 dB 	f = 500 MHz: < 0.2 dB
Connection inner conductor	Silver wire, Teflon insulated	Silver wire, Teflon insulated
Shield connection	Copper wire, silver-plated	Copper wire, silver-plated
Temperature range	+5°C ... +40°C	+5°C ... +40°C



Assembly instructions MAH 532

www.staubli.com/electrical

¹⁾ For mounting into pre-drilled plastic housings (double insulation) or metal housings³⁾ (basic insulation, with protective conductor)

²⁾ For mounting into pre-drilled metal housings³⁾ (double insulation, without protective conductor)

³⁾ Panel thickness max. 3 mm


XBWB-P

Touch-protected BNC angled socket for mounting on printed-circuit boards, touch-protected according to IEC / EN 61010-1. The socket is directly soldered onto printed-circuit boards. The right-angled configuration minimises the force transmitted to the printed-circuit board through the plugged-in test lead.


The socket has a flat surface which provides sufficient protection from twisting when connecting a BNC cable.

The socket shield consists of two insulated, semi-circular contacts, which are connected to each other when a plug is inserted (switch function). The four locating pins are connected to additional shielding.

The contact socket of the inner conductor of the BNC socket is in gold-plated brass. For use, for example, with high-impedance insulated oscilloscope inputs. The touch-protected BNC socket is compatible with conventional BNC connectors. With such combinations, however, the 1000 V touch protection no longer applies to the whole system.

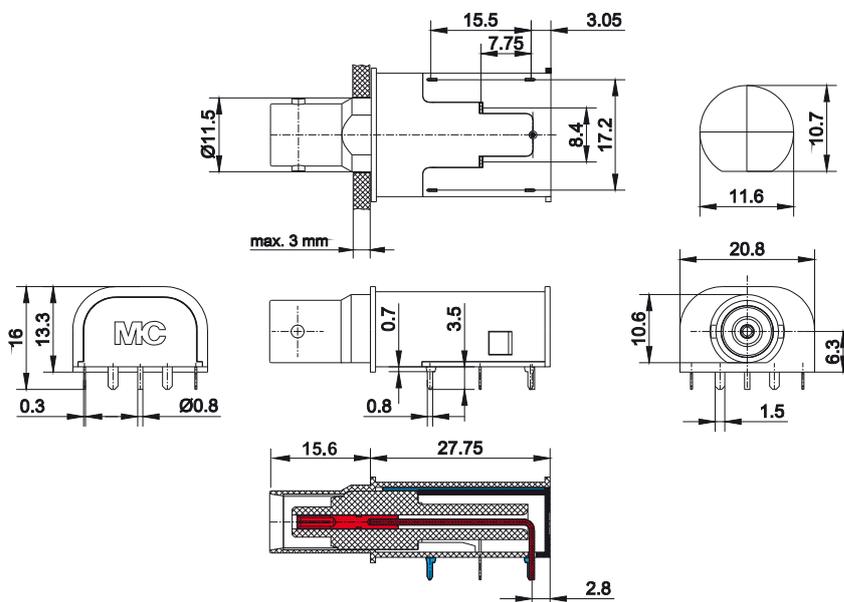

Order No.	Type	Rated voltage		*Colours
67.9569-*	XBWB-P	Max. 1000 V, CAT III (600 V, CAT IV)	Au Ni	21 22

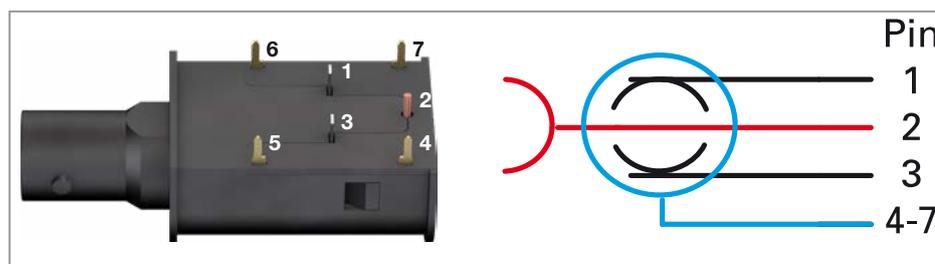

Pin	Description
1	Outer conductor, semi-circular contact 1
2	Inner conductor
3	Outer conductor, semi-circular contact 2
4, 5, 6, 7	Additional shielding




Assembly instructions MAH 563

www.staubli.com/electrical


BNC / Ø 4 mm Adapters and Adapter Leads

XM-BB/4 XM-SS/4 XF-BB/4 XF-SS/4


XM-BB/4

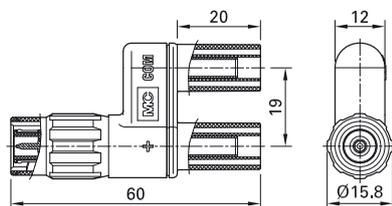


XM-SS/4

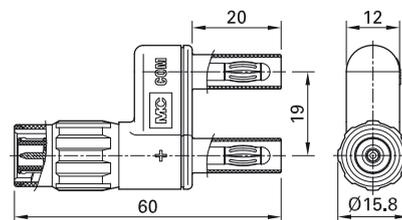

XF-BB/4

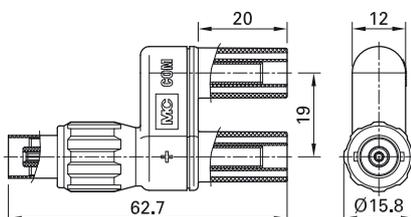

XF-SS/4

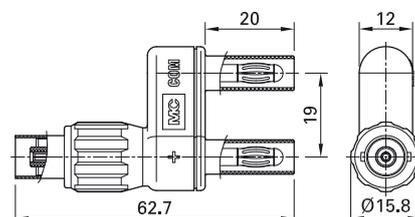

Order No.	Type	Rated voltage / current	BNC connector	Ø 4 mm connectors		Colour
67.9536-21	XM-BB/4	1000 V, CAT II (600 V, CAT III) / 1 A	BNC male connector	Ø 4 mm sockets	Au Ni CE cUL _{US} LISTED	21
67.9535-21	XM-SS/4	1000 V, CAT II (600 V, CAT III) / 1 A	BNC male connector	Ø 4 mm plugs	Au Ni CE cUL _{US} LISTED	21
67.9538-21	XF-BB/4	1000 V, CAT II (600 V, CAT III) / 1 A	BNC female connector	Ø 4 mm sockets	Au Ni CE cUL _{US} LISTED	21
67.9537-21	XF-SS/4	1000 V, CAT II (600 V, CAT III) / 1 A	BNC female connector	Ø 4 mm plugs	Au Ni CE cUL _{US} LISTED	21

XM-B


One-pole adapter with touch-protected BNC male connector linked to a Ø 4 mm rigid socket, accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

The contact pin of the BNC plug connector is in gold-plated brass.



User information **i013**

www.staubli.com/electrical




Order No.	Type	Rated voltage / current		*Colours
67.9799-*	XM-B	600 V, CAT II (300 V, CAT III) / 1 A	Au Ni CE	21 22 23

XLAM-414/SC XLAM-414/SC/SIL

Highly flexible, fully shielded adapter leads. One end with coaxial cable with touch-protected BNC male connector, other end

with in-line Ø 4 mm MULTILAM plugs with rigid insulating sleeve.

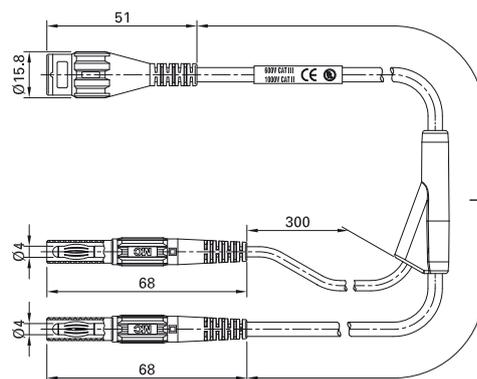

Order No.	Type		Lead lengths L [cm]	Colour
67.9842- <input type="checkbox"/>	XLAM-414/SC	Au Ni PVC CE cUL ^{US} LISTED	100 160	
67.9867- <input type="checkbox"/>	XLAM-414/SC/SIL	Au Ni SIL CE cUL ^{US} LISTED	100 160	


Technical Data

Type	XLAM-414/SC	XLAM-414/SC/SIL
Rated voltage	1000 V, CAT II (600 V, CAT III)	1000 V, CAT II (600 V, CAT III)
Capacity (f = 100 kHz)	100 pF (L = 100 cm) 160 pF (L = 160 cm)	150 pF (L = 100 cm) 240 pF (L = 160 cm)
Inductance (f = 100 kHz)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)
Coaxial lead (Type) / Insulation	RG58 / PVC	SILI-SC 0,5/1,0 / Silicon
Temperature range	-10°C ... +70°C	-50°C ... +150°C

XLAM-446/SC XLAM-446/SC/SIL

Highly flexible, fully shielded adapter leads.
One end with coaxial cable with touch-protected BNC male connector, other end

with stackable Ø 4 mm MULTILAM plugs
with rigid insulating sleeve.

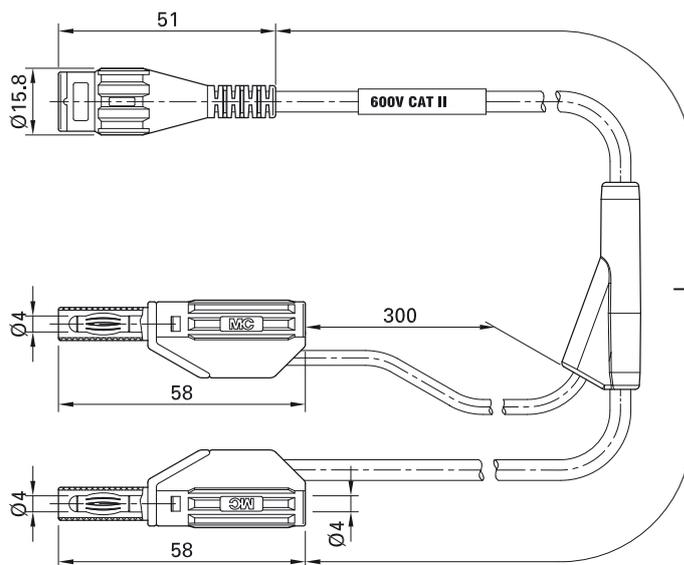

Order No.	Type		Lead lengths [cm]	Colour
67.9800- <input type="checkbox"/>	XLAM-446/SC	Au Ni PVC CE cUL LISTED	100 160	
67.9868- <input type="checkbox"/>	XLAM-446/SC/SIL	Au Ni SIL CE cUL LISTED	100 160	


Technical Data		
Type	XLAM-446/SC	XLAM-446/SC/SIL
Rated voltage	600 V, CAT II (300 V, CAT III)	600 V, CAT II (300 V, CAT III)
Capacity (f = 100 kHz)	100 pF (L = 100 cm) 160 pF (L = 160 cm)	150 pF (L = 100 cm) 240 pF (L = 160 cm)
Inductance (f = 100 kHz)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)	750 nH (L = 100 cm) 1000 nH (L = 160 cm)
Coaxial lead (Type) / Insulation	RG58 / PVC	SILI-SC 0,5/1,0 / Silicon
Temperature range	-10°C ... +70°C	-50°C ... +150°C

BNC / Ø 2 mm Adapters and Adapter Leads

XLAM-205L

Highly flexible adapter lead. One end with co-axial cable with touch-protected BNC male

connector, other end with in-line Ø 2 mm MULTILAM plugs with rigid insulating sleeve.

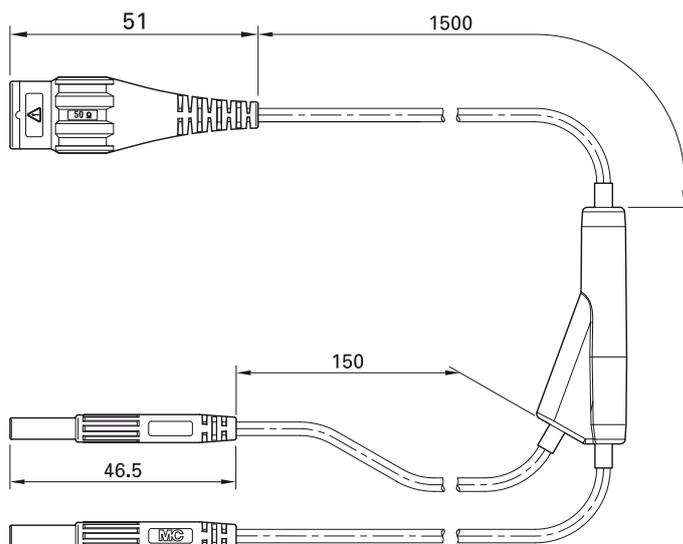

Order No.	Type	Rated voltage	Wire type		Lead lengths [cm]
67.9565-150	XLAM-205L	600 V, CAT II (300 V, CAT III)	RG174 2x 0.5 mm ²	PVC	150



User information i013


www.staubli.com/electrical

BNC Lead Couplers

XF-F

Lead coupler. The inner conductors and the shields are interconnected. The contact

sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

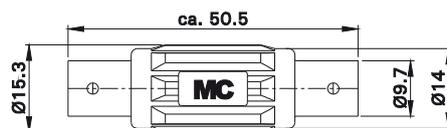

Order No.	Type	Rated voltage / current	Frequency range	VSWR		Colour
67.9547-28	XF-F	1000 V, CAT II (600 V, CAT III) / 1 A	DC ... 500 MHz	< 1.3	Au Ni CE	28



User information **i014**



www.staubli.com/electrical

BNC Signal Distributors

XM-FF

Signal distributor with three BNC safety connectors. All inner conductors and all shields are interconnected. The contact pins and

sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

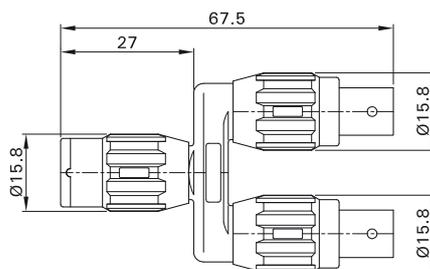

Order No.	Type	Rated voltage / current	Frequency range	VSWR		Colour
67.9783-21	XM-FF	600 V, CAT II (300 V, CAT III) / 1 A	-	-	Au Ni CE	21



User information **i013**

www.staubli.com/electrical


Touch-protected Adapters and Converters

BNC Box XBKS

Touch-protected empty BNC box for individual applications. The components in the box are connected by soldering. The BNC plug connectors allow these housings to be

easily inserted, e.g. by direct plugging into an oscilloscope input socket or as intermediate elements in BNC leads. The contact pins and sockets of the inner conductor of

the BNC plug connector are in gold-plated brass.

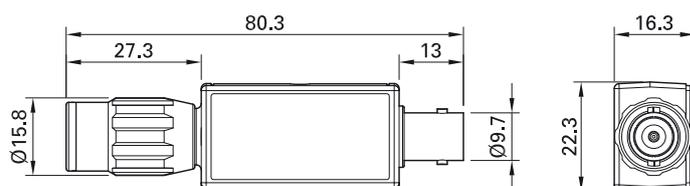

Order No.	Type	Rated voltage	Colour
67.9428	XBKS	Max. 300 V, CAT II ¹⁾	

¹⁾ Dependent on the component inserted.

Technical Information

The casings of mains-powered oscilloscopes can become live with dangerous voltages, if, for instance, the protective conductor is interrupted. Persons carrying out measurements then run the risk of an electric shock on touching bare metal parts. In such cases, adequate protection from accidents is assured only with the use of touch-protected test equipment in association with touch-protected test accessories.

Touch-protected and at the same time shielded test accessories are also of in-

creasing importance because the EMC directive prescribes shielded leads for many applications.


For safe use in the high-frequency range, our passive oscilloscope probes of the Isoprobe series and the push-on accessories are rated for voltages to earth of up to max. 1000 V, CAT II, (Isoprobe II) resp. 1000 V, CAT III / 600 V, CAT IV (Isoprobe III) and are designed with clearance and creepage distances in accordance with the strict requirements of IEC / EN 61010-031.

The probes Isoprobe and their push-on accessories are designed for voltages up to a maximum of 1000 V_{r.m.s.} between the internal conductor and shield – substantially higher than in conventional oscilloscope probes. This high dielectric strength allows high-frequency signals to be measured even when there is a direct mains connection.

In addition to our probes Isoprobe and the push-on accessories, with our BNC safety plug connectors we also supply a high-quality touch-protected BNC plug connection system to complete our safety high-frequency programme that is rated for voltages up to 1000 V, CAT II to earth and meets also the requirements of IEC / EN 61010-031.

This tried and tested BNC plug connector system has a long life of approximately 5000 connecting cycles. The shielded BNC test leads are highly flexible and are available with PVC and silicone insulation in a choice of colours.

All touch-protected BNC plug connectors are compatible with conventional BNC connectors. With such combinations, however, the 1000 V touch protection no longer applies to the whole system.

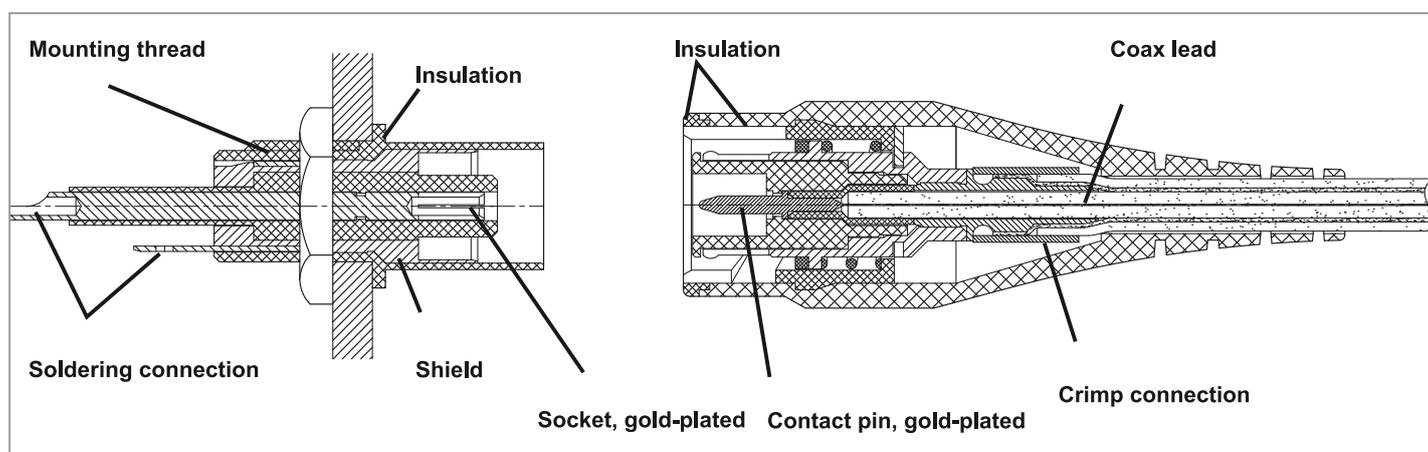


Test leads with touch-protected BNC plugs can be connected to devices with insulated and conventional BNC sockets.


As a result of the capacitive coupling between the shield and the "world outside" (e.g. a person touching the probe) the rated voltage shield/ground is frequency-dependent. As the frequency rises, the rated voltage falls until it approaches a lower

limit (left curve). The rated voltage inner conductor/shield falls exponentially with rising frequencies as a result of the capacitive properties of the probe and the limitation of the current due to the characteristics of the components (middle curve). The over-


all result is a fall in the rated voltage in accordance with the curve on the right. The curves in this example are for the test probe Isoprobe II - ECO.

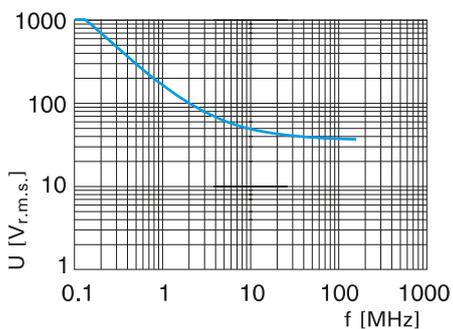

Voltage shield / earth

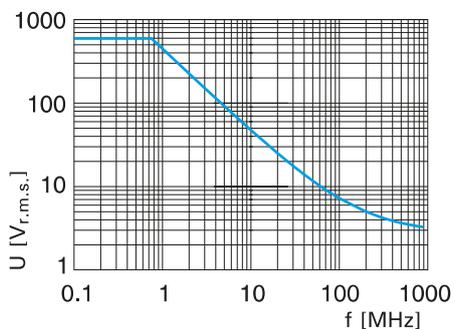

Voltage inner conductor / shield

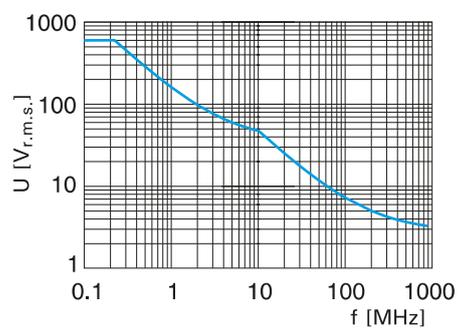

Rated voltage

Probes – essential equipment for oscilloscopes

The oscilloscope is one of the most important test instruments in electronics. Constant development has substantially enhanced the performance of these devices and expanded their range of applications. In order to display a test signal on these

instruments, an electrical connection must be established between the oscilloscope and the object under test. The aim in establishing such a connection is to transmit the signal from the point of measurement to the oscilloscope with a minimum of dis-

tortion. Here, various factors must be taken into consideration which call for the use of special probes. Probe systems are broadly classified into passive and active types.

Test conditions

Input impedance

Every oscilloscope has an input impedance which may be high or low [50 Ω]. In the case of a high-impedance oscilloscope, the input impedance consists of a real component, generally 1 MΩ, and a capacitive component of around 8 - 30 pF.

Vertical scaling

The maximum vertical scaling of an oscilloscope is usually 10 V/div, which means that a maximum amplitude of 80 V_{SS} can be displayed. For the measurement of larger voltage amplitudes, a voltage divider is required.

Practicability

In electrical testing it is often necessary to quickly tap off signals from different points. In this situation, time-consuming plugged, soldered or screwed connections are not practicable.

Outside interference


In order to eliminate outside interference, the system consisting of the probe and lead must be of coaxial design.

Principle of a passive, high-impedance probe

The example shows a probe with a dividing ratio of 10:1. This enables signals up to $800 V_{SS}$ to be visualised. As a result of the capacitive component of the scope's input

impedance and the capacity of the coaxial lead, it has the draw-back of a frequency dependence which must be compensated (C_v and C_{komp}). The input impedance of

the probe is thus $10 M\Omega \parallel C_{in}$. In probes of this type a typical value for C_{in} is around 10 - 15 pF (including stray capacities).

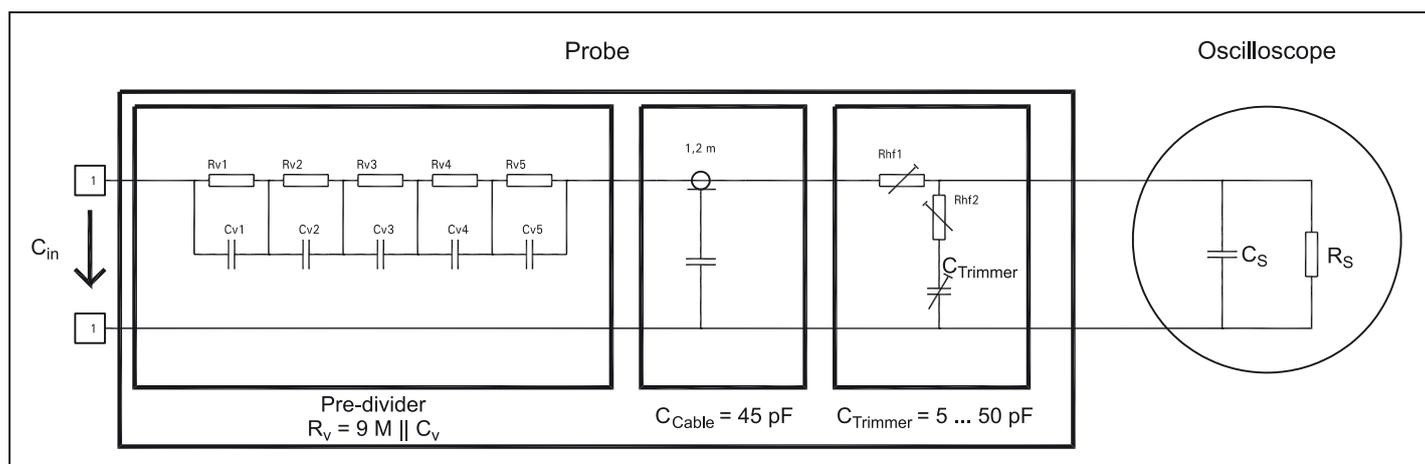

Schematic diagram of a passive 10:1 test probe

Limits to the use of passive probes

Today there are many suppliers of passive probes with bandwidths of up to 500 MHz. When using these probes at frequencies above 20 MHz, however, one should bear in mind the influence exerted on the test object by their input impedance.

At a frequency of 100 MHz, the passive probe shown in the example has an impedance of only 100 - 150 Ω . This already causes distortion of a signal from a 50 Ω -source. In order to reduce this distortion, the capacities of the coaxial lead and the scope

must be reduced. This is virtually impossible. However, there is another solution: an impedance converter needs to be installed directly after the divider in order to decouple it from the following components. In this situation an active probe may be a help.

Index

Type	Page
AB200	39
AC200	37
BA400	11
GB284	40
GH284	39
GM284	40
GM400	11
GS400	11, 38
HC200	37
HC400	11
Isoprobe II – 1:1	12
Isoprobe II – 10:1 – 2,5	20
Isoprobe II – 10:1 ECO	14
Isoprobe II – 10:1 HF	16
Isoprobe II – 10:1 HS	18
Isoprobe II – 100:1	22
Isoprobe III – 10:1 – 2,5	30
Isoprobe III – 10:1 ECO	24
Isoprobe III – 10:1 HF	26
Isoprobe III – 10:1 HS	28
Isoprobe III – 100:1	32
Isoprobe III – HP	35
Isoprobe IV – 10:1	8
Isoprobe IV – 100:1	9
PB200	38
PT200	38
SCC	40
SET Isoprobe II – 1:1	13
SET Isoprobe II – 10:1 – 2,5	21
SET Isoprobe II – 10:1 ECO	15
SET Isoprobe II – 10:1 HF	17
SET Isoprobe II – 10:1 HS	19
SET Isoprobe II – 100:1	23
SET Isoprobe III – 10:1 – 2,5	31
SET Isoprobe III – 10:1 ECO	25
SET Isoprobe III – 10:1 HF	27

Type	Page
SET Isoprobe III – 10:1 HS	29
SET Isoprobe III – 100:1	33
SET Isoprobe III – HP	36
SET Isoprobe IV – 10:1	10
SET Isoprobe IV – 100:1	10
SK-IP	39
XBB-C58	45
XBB-L	46
XBB-LL	46
XBB-P	47
XBB-PL	47
XBK-58	44
XBKS	55
XBS-58	44
XBWB-P	48
XF-BB/4	49
XF-F	53
XF-SS/4	49
XLAM-205L	52
XLAM-414/SC	50
XLAM-414/SC/SIL	50
XLAM-446/SC	51
XLAM-446/SC/SIL	51
XLSK-58	41
XLSS-58	41
XLSS-174	42
XLSS/SIL	43
XM-B	49
XM-BB/4	49
XM-FF	54
XM-SS/4	49
XTBA	38
ZGA	37
ZGA-S	37

Notes

Notes



■ Stäubli Units ○ Agents

Global presence of the Stäubli Group

www.staubli.com