


## Isoprobe II – 10:1 ECO

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjust-

ment screw and Ø 2 mm safety socket for reference lead connection in the handling part. Economically priced model.

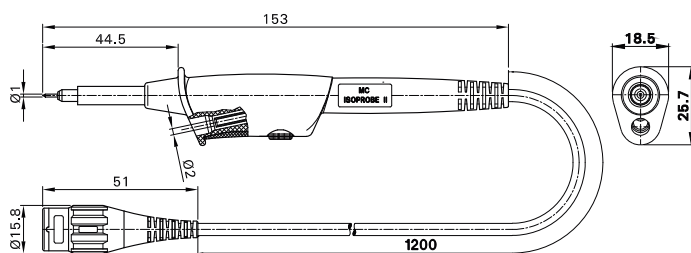

Order No.	Type		Lead length [cm]	Colour
68.9880-12028	Isoprobe II – 10:1 ECO	PVC CE cUL LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 600 V, CAT II (300 V, CAT III)	
Dividing ratio	10:1	
Input capacitance	13 pF	
Compensation range (works setting)	10 pF ... 30 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	1 ns	
Lead length	120 cm	



### User information i048


[www.staubli.com/electrical](http://www.staubli.com/electrical)

## SET Isoprobe II – 10:1 ECO





The basic set Isoprobe II - 10:1 ECO includes a basic set of accessories for effect-


ing safe and accurate high-frequency measurements. Good value for money.



Order No.	Type	Rated voltage		Colour
68.9491-28	SET Isoprobe II – 10:1 ECO	Max. 600 V, CAT II (300 V, CAT III)	CE 	28

### Supplied components

Isoprobe II – 10:1 ECO Page 14	
HC200 Page 37	
GS400 Page 38	
GM200 Page 40	

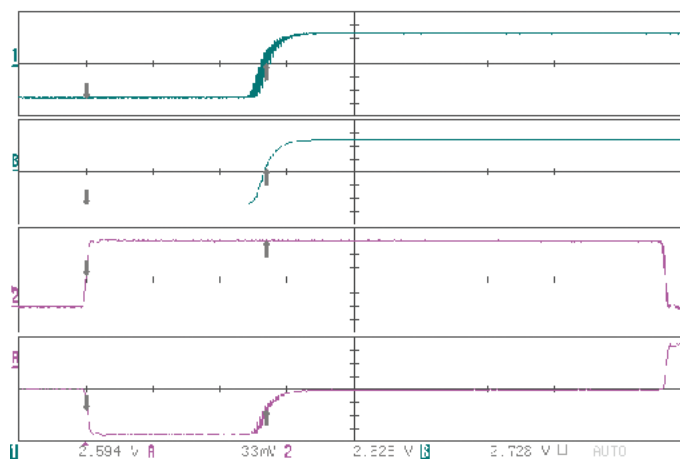

### User information **i048**

[www.staubli.com/electrical](http://www.staubli.com/electrical)