


## Isoprobe II – 10:1 HF

Safety high-frequency 10:1 test probe highly flexible PVC-insulated coaxial connecting lead with BNC plug. Compensation adjustment screw and Ø 2 mm safety socket for


reference lead connection in the handling part. Wide frequency range combined with high dielectric strength.

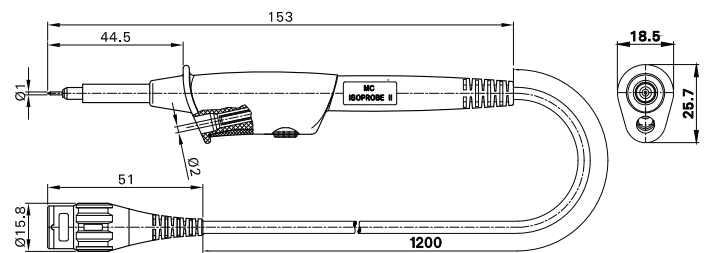

Order No.	Type		Lead length [cm]	Colour
68.9872-12022	Isoprobe II – 10:1 HF	PVC CE cUL LISTED	120	22

### Technical Data

Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III)
Dividing ratio	10:1
Input capacitance	14 pF
Compensation range (works setting)	12 pF ... 22 pF (15 pF)
Input resistance	10 MΩ
Frequency range	0 ... 450 MHz
Rise time	1 ns
Lead length	120 cm

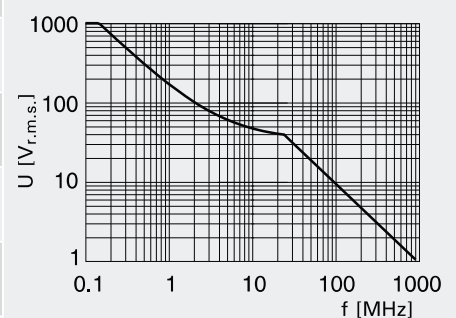


### User information i042

[www.staubli.com/electrical](http://www.staubli.com/electrical)






## SET Isoprobe II – 10:1 HF


Test probe set with extensive range of accessories for the needs of the professionally equipped test engineer.



Order No.	Type	Rated voltage		Colour
68.9492-22	SET Isoprobe II – 10:1 HF	Max. 1000 V, CAT II (600 V, CAT III)	CE 	22

### Supplied components

Isoprobe II – 10:1 HF Page 16	
HC200 Page 37	
GS400 Page 38	
GH200 Page 39	
GM200 Page 40	

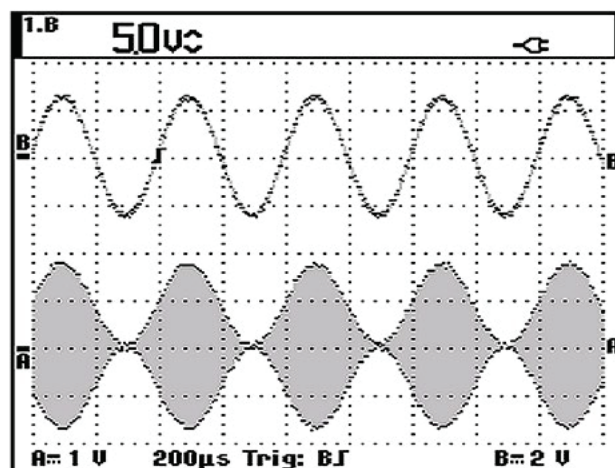

### User information i042

[www.staubli.com/electrical](http://www.staubli.com/electrical)