


Isoprobe III – 10:1 HF

Safety high-frequency 10:1 test probe with wide frequency range combined with low input capacitance. Highly flexible PVC-

insulated coaxial connecting lead with BNC plug with integrated compensation unit.

Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

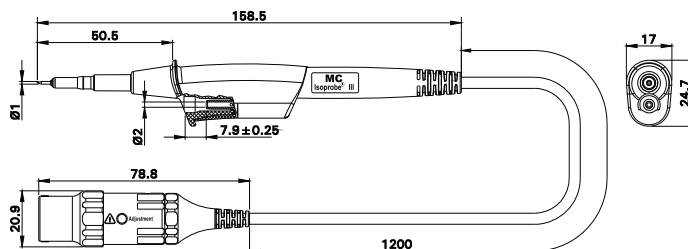

Order No.	Type		Lead length [cm]	Colour
68.9534-12028	Isoprobe III – 10:1 HF	PVC CE cUL LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	12 pF	
Compensation range (works setting)	10 pF ... 22 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 500 MHz	
Rise time	0.9 ns	
Lead length	120 cm	



User information i084


www.staubli.com/electrical

SET Isoprobe III – 10:1 HF








The Isoprobe III - 10:1 HF set with an extensive range of accessories meets the needs


of the professionally equipped electronic engineer.



Order No.	Type	Rated voltage		Colour
68.9556-28	SET Isoprobe III – 10:1 HF	Max. 1000 V, CAT III (600 V, CAT IV)	CE 	28

Supplied components

Isoprobe III – 10:1 HF Page 27			
ZGA-S Page 37		SK-IP Page 39	
GS400 Page 38		SCC Page 40	
GH284 Page 39			
GM284 Page 40			

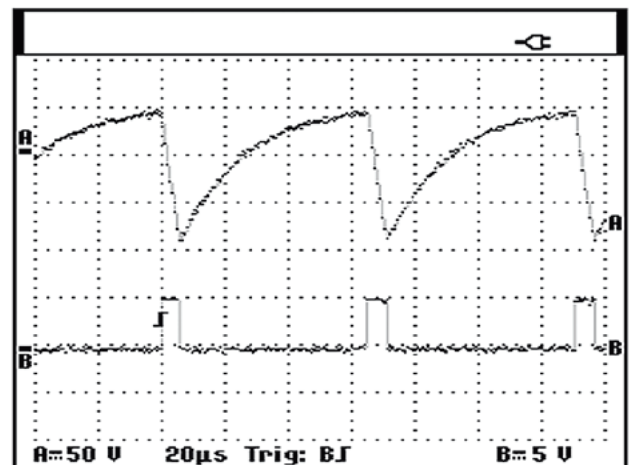

User information **i084**

www.staubli.com/electrical