


Adapter lead XLAM-414/SC...

Highly flexible, fully shielded adapter leads.
One end with coaxial cable with touch-protected BNC male connector, other end with

in-line Ø 4 mm MULTILAM plugs with rigid insulating sleeve.

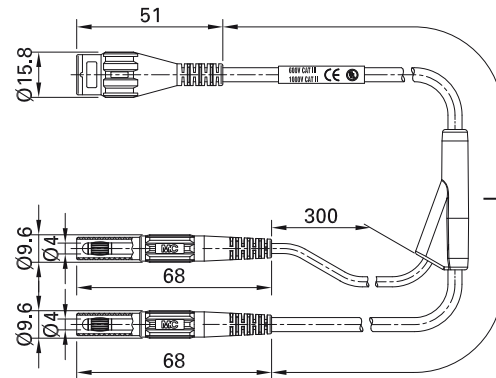

Order No.	Type	Rated voltage	Lead		Lead lengths L [cm]
67.9842- <input type="text"/>	XLAM-414/SC	1000 V, CAT II 600 V, CAT III	PVC RG58	Au Ni CE UL	100 160
67.9867- <input type="text"/>	XLAM-414/SC/SIL	1000 V, CAT II 600 V, CAT III	SIL SILI-SC 0,5/1,0	Au Ni CE UL	100 160