

XLAM-H200



Highly flexible BNC test lead. One end with two hook clips, other end with touch-

protected BNC male connector (red clip: BNC inner conductor / black clip: shield).



RZ Sheet RZ013

www.staubli.com/electrical

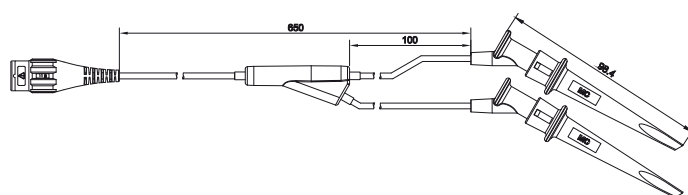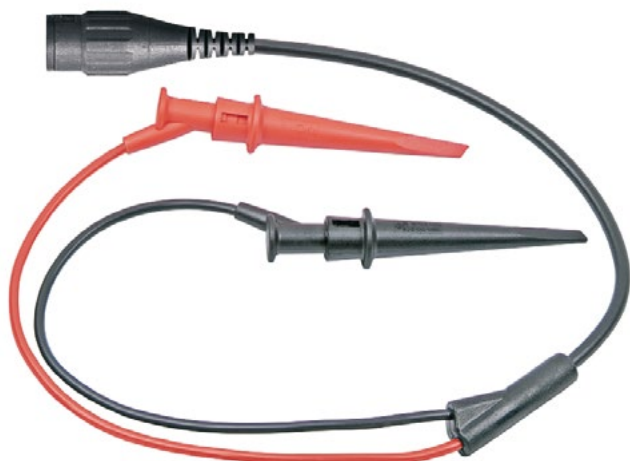


Order No.	Type	Rated voltage / current	Lead cross section		Lead lengths [cm]	*Colours
67.9424-065	XLAM-H200	600 V, CAT II (300 V, CAT III)	RG174 2x 1.0 mm ²	PVC CE	065	

XLAM-H200

Highly flexible BNC test lead. One end with two hook clips, other end with touch-

protected BNC male connector (red clip: BNC inner conductor / black clip: shield).

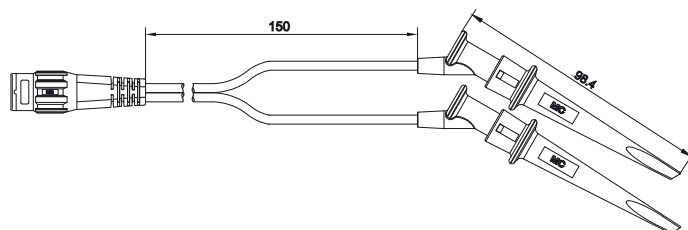

Order No.	Type	Rated voltage / current	Lead cross section		Lead lengths [cm]	*Colours
67.9419-015	XBH-200	1000 V, CAT II (600 V, CAT III)	2x 0.5 mm ²	SIL CE	015	