


BNC Lead Couplers

XF-F

Lead coupler. The inner conductors and the shields are interconnected. The contact

sockets of the inner conductor of the BNC plug connector are in gold-plated brass.

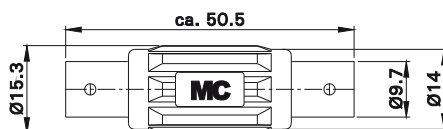

Order No.	Type	Rated voltage / current	Frequency range	VSWR		Colour
67.9547-28	XF-F	1000 V, CAT II (600 V, CAT III) / 1 A	DC ... 500 MHz	< 1.3	Au Ni CE	28



User information **i014**

www.staubli.com/electrical