



## Test lead FML SML

Highly flexible, with moulded stackable  
 Ø 4 mm MULTILAM plugs on both ends.

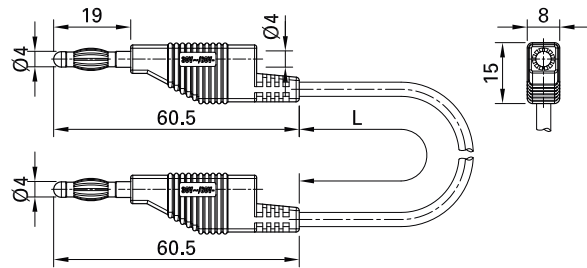

| Order No.  | Type | Rated voltage/current          | Lead                     |    | Lead length L [cm] | *Standard colors |
|------------|------|--------------------------------|--------------------------|----|--------------------|------------------|
| 64.7289-□* | FML  | 30 VAC / 15 A<br>60 VDC / 15 A | PVC 0.75 mm <sup>2</sup> | Ni | 100                | 21 22            |
| 64.7288-□* | SML  | 30 VAC / 15 A<br>60 VDC / 15 A | SIL 0.75 mm <sup>2</sup> | Ni | 025 050 100 200    | 21 22 23 24 25   |

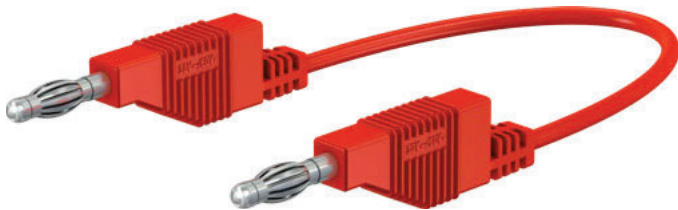

Optional colors 23 24 25 26 29

Optional lengths on demand

Further information, page 6



User information **i002**

[www.staubli.com/electrical](http://www.staubli.com/electrical)