


Test lead SLK4...-L...

Highly flexible, with in-line Ø 4 mm MULTILAM plug with rigid insulating sleeve on both ends.

SLK...-L...

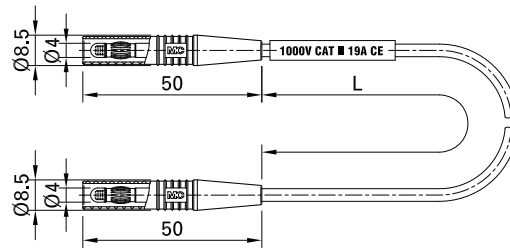

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
28.0083-□*	SLK410-L	1000 V, CAT II / 19 A	PVC 1.0 mm ²	Au CE	025 050 075 100 150 200	21 22 23 24 25 27
28.0103-□*	SLK425-L	1000 V, CAT II / 32 A	PVC 2.5 mm ²	Au CE	100 150 200	21 22
49.0105-□*	SLK425-L/N	1000 V, CAT II / 32 A	PVC 2.5 mm ²	Ni CE	050	21 22



Optional colors 23 24 25 27

Optional lengths on demand

Further information, page 6