


Test lead XM...-402

Highly flexible, with insulation in PVC or silicone with in-line Ø 4 mm MULTILAM plug with rigid insulating sleeve on both ends.

XM...-402

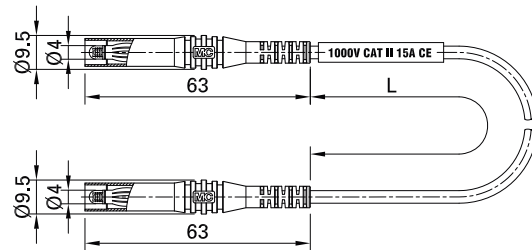

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
66.9634-□*	XMF-402	1000 V, CAT II / 15 A	PVC 0.75 mm ²	Ni CE c UL US	100 200	21 22 23
66.9635-□*	XMS-402	1000 V, CAT II / 15 A	SIL 0.75 mm ²	Ni CE c UL US	100 200	21 22 23 24 25



Optional colors 20 24 25 26

Optional lengths on demand

Further information, page 6