


## Extension lead XK...-414

Highly flexible, with insulation in PVC or silicone. One end with Ø 4 mm MULTILAM plug

with rigid insulating sleeve, the other end sleeve. with Ø 4 mm rigid socket with rigid insulating

### XK...-414

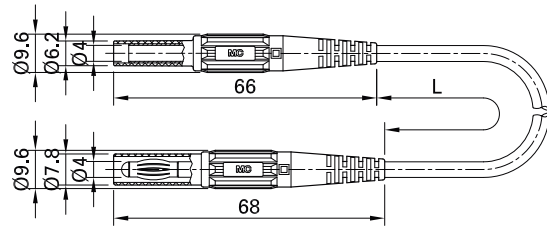

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
66.9011-□*	XKF-414	1000 V, CAT III / 19 A	PVC 1.0 mm <sup>2</sup>	Ni CE c UL us	050 100 150 200	21 22 23 24
66.9012-□*	XKS-414	1000 V, CAT III / 19 A	SIL 1.0 mm <sup>2</sup>	Ni CE c UL us	050 100 200	21 22 23



Optional colors 24 25 26 27 29

Optional lengths on demand

Further information, page 6