


Plug SLS425-AM

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.

Screw connection.

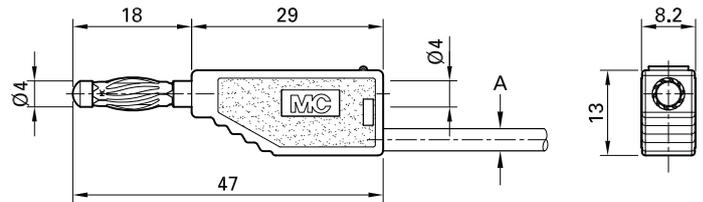

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors										
22.2633-*	SLS425-AM	30 VAC / 32 A 60 VDC / 32 A	~ Ø 4.0 mm 2.5 mm ²	Au	<table border="1"> <tr> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>29</td> <td></td> <td></td> <td></td> </tr> </table>	20	21	22	23	24	25	29			
20	21	22	23	24											
25	29														

Component parts

22.2160-*	KT425-A	Insulator
22.1028	LS425-AM	Plug



Optional colors 26 27 28

Further information, page 6



Assembly instructions MA110

www.staubli.com/electrical