


## Plug L-400

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.

**Solder connection.**

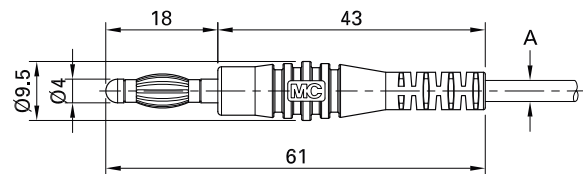


Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
64.9294-*	L-400	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm <sup>2</sup>	Ni	21 22 23 24 25

## Plug L-409

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.

**Screw connection.**

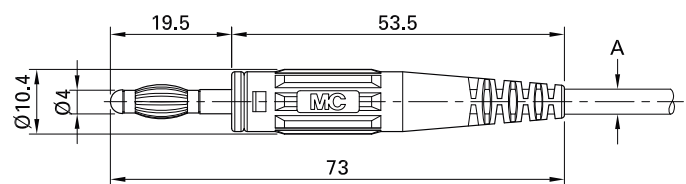

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
64.9195-*	L-409	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm <sup>2</sup>	Ni	21 22 23 24 25



Optional colors 26 27 29

Further information, page 6