


Plug SLS425-ZL...

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads. With retractable sleeve to prevent accidental touching.

Various types of connection:

SLS425-ZL: Solder connection

SLS425-ZL/M3: Screw connection

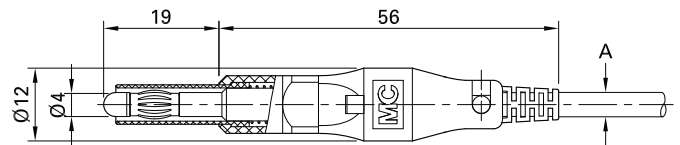

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors														
22.2652-*	SLS425-ZL	30 VAC / 32 A 60 VDC / 32 A	<table border="0"> <tr> <td>PVC</td> <td>TPE</td> <td>Ø 3.7 mm</td> <td rowspan="2">2.5 mm²</td> <td rowspan="2">Ni</td> <td rowspan="2"> <table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table> </td> </tr> <tr> <td>SIL</td> <td></td> <td>Ø 3.9 mm</td> </tr> </table>	PVC	TPE	Ø 3.7 mm	2.5 mm ²	Ni	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table>	21	22	23	24	25	SIL		Ø 3.9 mm		
PVC	TPE	Ø 3.7 mm	2.5 mm ²	Ni	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table>	21				22	23	24	25						
21	22	23				24	25												
SIL		Ø 3.9 mm																	
22.2653-*	SLS425-ZL/M3	30 VAC / 32 A 60 VDC / 32 A	<table border="0"> <tr> <td>PVC</td> <td>TPE</td> <td>Ø 3.7 mm</td> <td rowspan="2">2.5 mm²</td> <td rowspan="2">Ni</td> <td rowspan="2"> <table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table> </td> </tr> <tr> <td>SIL</td> <td></td> <td>Ø 3.9 mm</td> </tr> </table>	PVC	TPE	Ø 3.7 mm	2.5 mm ²	Ni	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table>	21	22	23	24	25	SIL		Ø 3.9 mm		
PVC	TPE	Ø 3.7 mm	2.5 mm ²	Ni	<table border="0"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> </table>	21				22	23	24	25						
21	22	23				24	25												
SIL		Ø 3.9 mm																	

Component parts

50.1138-*	KT425-ZL	Insulator
49.2030	LS425-ZL	Plug for SLS425-ZL
49.2029	LS425-ZL/M3	Plug for SLS425-ZL/M3



Assembly instructions MA130

www.staubli.com/electrical