

## Plug SLS425-SE...


Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads. With rigid insulating sleeve. Nickel-plated and gold-plated versions available.

### Various types of connection:

SLS425-SE/M: Screw connection

SLS425-SE(N): Cylindrical soldering surface

SLS425-SE/Q(N): Cross hole for solder connection

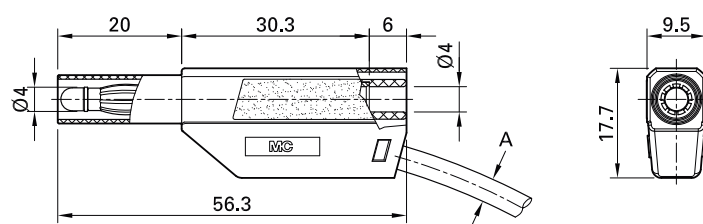

| Order No. | Type          | Rated voltage/current                          | Cable (A)                                  |    | *Standard colors  |    |    |    |    |    |    |    |    |    |    |
|-----------|---------------|--|--|----|---|----|----|----|----|----|----|----|----|----|----|
| 22.2656-* | SLS425-SE/M   | 1000 V, CAT II / 32 A<br>600 V, CAT III / 32 A | ~ Ø 3.9 mm    0.75 ... 2.5 mm <sup>2</sup> | Au | <table border="1"> <tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr> <tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr> </table> | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 20        | 21            | 22   | 23   | 24 |   |    |    |    |    |    |    |    |    |    |    |
| 25        | 26            | 27   | 28   | 29 |   |    |    |    |    |    |    |    |    |    |    |
| 22.2655-* | SLS425-SE     | 1000 V, CAT II / 32 A<br>600 V, CAT III / 32 A | ~ Ø 3.9 mm    0.75 ... 2.5 mm <sup>2</sup> | Au | <table border="1"> <tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr> <tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr> </table> | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 20        | 21            | 22   | 23   | 24 |   |    |    |    |    |    |    |    |    |    |    |
| 25        | 26            | 27   | 28   | 29 |   |    |    |    |    |    |    |    |    |    |    |
| 22.2654-* | SLS425-SE/N   | 1000 V, CAT II / 32 A<br>600 V, CAT III / 32 A | ~ Ø 3.9 mm    0.75 ... 2.5 mm <sup>2</sup> | Ni | <table border="1"> <tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr> <tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr> </table> | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 20        | 21            | 22   | 23   | 24 |   |    |    |    |    |    |    |    |    |    |    |
| 25        | 26            | 27   | 28   | 29 |   |    |    |    |    |    |    |    |    |    |    |
| 22.2658-* | SLS425-SE/Q   | 1000 V, CAT II / 32 A<br>600 V, CAT III / 32 A | ~ Ø 3.9 mm    0.75 ... 2.5 mm <sup>2</sup> | Au | <table border="1"> <tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr> <tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr> </table> | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 20        | 21            | 22   | 23   | 24 |   |    |    |    |    |    |    |    |    |    |    |
| 25        | 26            | 27   | 28   | 29 |   |    |    |    |    |    |    |    |    |    |    |
| 22.2657-* | SLS425-SE/Q/N | 1000 V, CAT II / 32 A<br>600 V, CAT III / 32 A | ~ Ø 3.9 mm    0.75 ... 2.5 mm <sup>2</sup> | Ni | <table border="1"> <tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr> <tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr> </table> | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| 20        | 21            | 22   | 23   | 24 |   |    |    |    |    |    |    |    |    |    |    |
| 25        | 26            | 27   | 28   | 29 |   |    |    |    |    |    |    |    |    |    |    |

### Component parts

|           |              |                                      |
|-----------|--------------|--------------------------------------|
| 22.2380-* | KT425-SE     | Insulator (*Colors see: SLS425-SE/M) |
| 22.1027   | LS425-SE/M   | Plug suitable for: SLS425-SE/M       |
| 22.1047   | LS425-SE     | Plug suitable for: SLS425-SE         |
| 22.1048   | LS425-SE/N   | Plug suitable for: SLS425-SE/N       |
| 22.1203   | LS425-SE/Q   | Plug suitable for: SLS425-SE/Q       |
| 22.1204   | LS425-SE/Q/N | Plug suitable for: SLS425-SE/Q/N     |



### Assembly instructions MA161

[www.staubli.com/electrical](http://www.staubli.com/electrical)