


Panel-mount socket LB-IF4R-A

Insulated, Ø 4 mm, with spring-loaded MULTILAM. Machined brass. Metal thread jacket on the insulation. The socket can be screw-mounted in predrilled panels.

Flat connecting tab 4.8 mm x 0.8 mm.

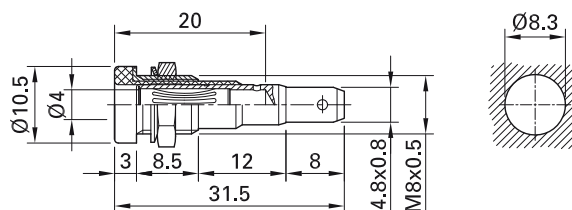

Order No.	Type	Rated voltage/current		*Standard colors
23.0210-*	LB-IF4R-A	30 VAC / 25 A 60 VDC / 25 A	Opt	21 22

Component parts

23.6666-*	BI-LB-IF4R-A	Socket without nut
Page 166	MU/M8x0,5	Hexagonal Nuts
Page 167	SP4	Washer



Optional colors 20 23 24 25 26 27 28 29

Further information, page 6



Flat connecting FSH4,8x0,8, page 170