


## Panel-mount socket LB-IF4R


Insulated, Ø 4 mm, with spring-loaded MULTILAM. Machined brass. Metal thread jacket on the insulation. The socket can be screw-mounted in predrilled panels. Available with hexagonal or round nut.

**Solder connection.**

### LB-IF4R

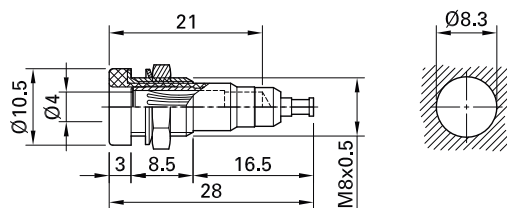

### LB-IF4R

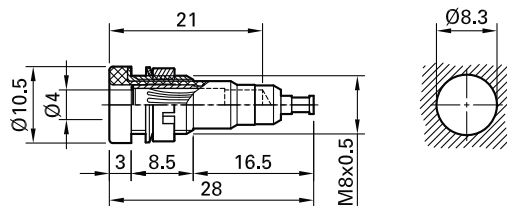

Order No.	Type	Rated voltage/current	Nut		*Standard colors
23.0140-*	LB-IF4R	30 VAC / 25 A 60 VDC / 25 A	Hexagonal nut	Opt	21 22 23
23.0130-*	LB-IF4R	30 VAC / 25 A 60 VDC / 25 A	Round Nut	Opt	21 22

### Component parts

23.6444-*	BI-LB-IF4R	Socket without nut
Page 166	MU/M8x0,5	Hexagonal Nuts
Page 167	MUR/M8x0,5	Round Nut
Page 167	SP4	Washer



Optional colors 20 23 24 25 26 27 28 29

Further information, page 6